

SUBJECT : **Environmental Protection Technical Specifications**
REQUIREMENTS incl. Amdt. : **Regulation (EU) 2018/1139, Article 9(2), Annex III**
ASSOCIATED IM/MoC¹ : Yes / No
ADVISORY MATERIAL : --

INTRODUCTORY NOTE:

The Agency has received applications for the certification of products for which the standards to ensure the environmental compatibility (i.e. noise, engine emissions, CO₂ emissions) are not stipulated in any of the three volumes of Annex 16 to the Chicago Convention. The Agency needs therefore to develop a new regulatory framework in line with the provisions of the essential requirements for environmental compatibility contained in Annex III of the Regulation (EU) 2018/1139 (BR) and related to the certification of the product design.

The BR contains the necessary empowerments which allow the Commission to develop further detailed environmental protection requirements under the delegated powers of Article 19(1)(a), for manned aircraft, and under Article 58(1)(a) for unmanned aircraft.

Article 76 (3) of the BR allows the Agency to issue certification specifications and other detailed specifications, acceptable means of compliance and guidance material for the application of the Basic Regulation and of the delegated and implementing acts adopted on the basis thereof.

In absence of the detailed environmental protection requirements adopted by the Commission in accordance with Article 19(1)(a) or 58(1)(a) of the BR, EASA proposes, as an interim measure, to issue these EPTS to illustrate to first applicants what is expected from them during the certification projects.

Once sufficient knowledge and experience has been acquired, the necessary regulatory changes will be initiated through an Opinion of the Agency containing proposals for a delegated act to be adopted by the Commission as stipulated in the BR.

Considering all the above, the following EPTS are proposed. They contain the applicable noise technical specifications and procedures that the applicants should use when applying for the issuance of the type certificate for a vertical take-off and landing aircraft powered by multiple vertical, non-tilting, evenly distributed electric rotors. Because the latter do not emit nitric oxides, carbon monoxide, unburned hydrocarbons, visible smoke or non-volatile particulate matter during operation, no specifications for engine emissions are proposed within these EPTS. Similarly, the Agency does not propose any CO₂ emissions or efficiency specifications for this design at this stage.

The present noise technical specifications were initiated from the content of Chapter 8 of ICAO Annex 16 Volume I and associated Evaluation Method of Appendix 2 and Guidance Material from ICAO ETM, which applies to heavy helicopters, to allow for a level playing-field and comparability of technology. The procedures are adapted to the characteristics of eVTOL aircraft with multiple vertical, non-tilting, evenly distributed rotors where necessary, for instance, by extending the lower test height limit to anticipate the

¹ In case of SC, the associated Interpretative Material and/or Means of Compliance may be published for awareness only and they are not subject to public consultation.

| | | |
|--|--|--|
|  <p>EASA European Union Aviation Safety Agency</p> | <p>Consultation Paper</p> <p>Environmental Protection Technical Specifications applicable to eVTOL powered by multiple, vertical, non-tilting, evenly distributed rotors</p> | <p>Issue : 1 Date : 04 May 2023 Proposed <input checked="" type="checkbox"/> Final <input type="checkbox"/> Deadline for comments: 15 June 2023</p> |
|--|--|--|

lower noise signature of such designs, or by allowing a more refined source noise correction than for classic helicopters. In addition, in order to aid the noise assessment of operations in the vicinity of vertiports, a hover noise assessment has been developed. The maximum allowable noise levels are kept identical to those of Chapter 8.4.2 while EASA collects more noise data from such designs through certification projects.



ENVIRONMENTAL PROTECTION TECHNICAL SPECIFICATIONS FOR THE CERTIFICATION OF VERTICAL TAKE-OFF AND LANDING AIRCRAFT POWERED BY MULTIPLE, VERTICAL, NON-TILTING, EVENLY DISTRIBUTED ELECTRIC ROTORS

Table of contents

| | |
|---|----|
| Table of contents..... | 3 |
| Table of figures..... | 6 |
| Table of tables..... | 6 |
| SUBPART A – GENERAL..... | 7 |
| NVTOL.1000..... - Applicability | 7 |
| NVTOL.1005 - Definitions..... | 7 |
| SUBPART B – NOISE EVALUATION METRICS..... | 8 |
| NVTOL.1100 - Applicable noise evaluation metrics..... | 8 |
| NVTOL.1105 - Calculation of Effective Perceived Noise Level..... | 8 |
| MoC1 NVTOL.1105 - Calculation of Effective Perceived Noise Level..... | 13 |
| IM1 NVTOL.1105 - Calculation of Effective Perceived Noise Level..... | 14 |
| NVTOL.1110 - Calculation of A-weighted continuous sound pressure level..... | 14 |
| SUBPART C – REFERENCE CONDITIONS AND PROCEDURES..... | 16 |
| NVTOL.1200 - Reference noise measurement points..... | 16 |
| IM1 NVTOL.1200 - Reference noise measurement points..... | 17 |
| NVTOL.1205 – Reference procedures..... | 18 |
| NVTOL.1210 - Reference atmospheric conditions..... | 19 |
| SUBPART D – MAXIMUM ALLOWABLE NOISE LEVELS..... | 20 |
| IM1 SUBPART D Maximum Allowable Noise Levels..... | 20 |
| SUBPART E – NOISE TEST..... | 21 |
| NVTOL.1400 - Test environment conditions..... | 21 |
| MoC1 NVTOL.1400 - Test environment conditions..... | 22 |
| MoC2 NVTOL.1400 - Test environment conditions..... | 22 |
| IM1 NVTOL.1400 - Test environment conditions..... | 24 |
| NVTOL.1405 - Flight test procedures..... | 24 |
| MoC1 NVTOL.1405 - Flight test procedures..... | 26 |

Consultation Paper

Environmental Protection Technical Specifications applicable to eVTOL powered by multiple, vertical, non-tilting, evenly distributed rotors

Issue : 1
 Date : 04 May 2023
 Proposed Final
 Deadline for comments: 15 June 2023

| | |
|--|----|
| MoC2 NVTOL.1405 - Flight test procedures | 26 |
| IM1 NVTOL.1405 - Flight test procedures | 27 |
| IM2 NVTOL.1405 - Flight test procedures | 27 |
| IM3 NVTOL.1405 - Flight test procedures | 30 |
| IM4 NVTOL.1405 - Flight test procedures | 31 |
| NVTOL.1410 - Noise measurement | 32 |
| MoC1 NVTOL.1410 - Noise measurement..... | 34 |
| MoC2 NVTOL.1410 - Noise measurement..... | 34 |
| MoC3 NVTOL.1410 - Noise measurement..... | 34 |
| IM1 NVTOL.1410 - Noise measurement | 34 |
| NVTOL.1415 - Spatial positioning and speed measurement..... | 35 |
| MoC1 NVTOL.1415 - Spatial positioning and speed measurement..... | 35 |
| IM1 NVTOL.1415 - Spatial positioning and speed measurement | 36 |
| SUBPART F – NOISE TEST EQUIPMENT | 37 |
| NVTOL.1500 - Noise measurement system..... | 37 |
| NVTOL.1505 - Microphone system characteristics and set-up | 37 |
| MoC1 NVTOL.1505 - Microphone system characteristics and set-up | 38 |
| MoC2 NVTOL.1505 - Microphone system characteristics and set-up | 39 |
| IM1 NVTOL.1505 - Microphone system characteristics and set-up | 39 |
| NVTOL.1510 - Recording and reproducing system..... | 39 |
| MoC1 NVTOL.1510 - Recording and reproducing system | 40 |
| MoC2 NVTOL.1510 - Recording and reproducing system | 40 |
| MoC3 NVTOL.1510 - Recording and reproducing system | 41 |
| IM1 NVTOL.1510 - Recording and reproducing system | 41 |
| IM2 NVTOL.1510 - Recording and reproducing system | 41 |
| NVTOL.1515 - Analysis system | 41 |
| MoC1 NVTOL.1515 - Analysis system | 42 |
| MoC2 NVTOL.1515 - Analysis system | 43 |
| IM1 NVTOL.1515 - Analysis system | 43 |
| IM2 NVTOL.1515 - Analysis system | 43 |
| NVTOL.1520 - Calibration systems | 45 |
| SUBPART G – CONFORMITY PROCEDURE..... | 46 |
| NVTOL.1600 - Adjustments of the measured sound levels..... | 46 |
| MoC1 NVTOL.1600 - Adjustments of the measured sound levels..... | 50 |
| MoC2 NVTOL.1600 - Adjustments of the measured sound levels..... | 56 |

Consultation Paper

**Environmental Protection Technical
Specifications applicable to eVTOL
powered by multiple, vertical, non-tilting,
evenly distributed rotors**

Issue : 1
 Date : 04 May 2023
 Proposed Final
 Deadline for comments: 15 June 2023

MoC3 NVTOL.1600 - Adjustments of the measured sound levels..... 63

IM1 NVTOL.1600 - Adjustments of the measured sound levels..... 64

IM2 NVTOL.1600 - Adjustments of the measured sound levels..... 64

IM3 NVTOL.1600 - Adjustments of the measured sound levels..... 64

NVTOL.1605 – Satisfying maximum allowable noise levels 65

IM1 NVTOL.1605 – Satisfying maximum allowable noise levels..... 67

SUBPART H – REPORTING..... 69

NVTOL.1700 - Noise data..... 69

NVTOL.1705 - Aircraft information..... 70

NVTOL.1710 - Additional test information..... 71

Table of figures

| | |
|---|----|
| Figure 1: Perceived Noisiness as a function of Sound Pressure Level..... | 12 |
| Figure 2: Example of a noise time history | 14 |
| Figure 3: side view of the reference noise measurement points of the hover procedure | 17 |
| Figure 4: top view of the reference noise measurement points of the hover procedure | 17 |
| Figure 5: depiction of allowable flight boundaries for the hover procedure | 27 |
| Figure 6: Comparison of measured and reference take-off profiles..... | 28 |
| Figure 7: Comparison of measured and reference overflight profiles..... | 30 |
| Figure 8: Comparison of measured and reference approach profiles | 31 |
| Figure 9: illustration of sound incidence angles on a microphone and positioning for noise measurements ... | 39 |
| Figure 10: Determination of SLOW timestamp from analysis start time | 45 |
| Figure 11: Single-point flight path descriptors..... | 59 |
| Figure 12: Detailed CPA geometry | 61 |
| Figure 13: depiction of reference flight path and sound propagation | 62 |

Table of tables

| | |
|--|----|
| Table 1: Tone Correction factors | 11 |
| Table 2: Constants for mathematically formulated noy values | 13 |
| Table 3: maximum allowed noise levels of the aircraft as a function of MTOM..... | 20 |
| Table 4: Values of $\eta(\delta)$ | 23 |
| Table 5: Values of f_0 | 23 |
| Table 6: microphone system directional response specifications | 38 |

SUBPART A – GENERAL

NVTOL.1000 - Applicability

These Environmental Protection Technical Specifications concern the design referred to in the Identification of the Issue.

NVTOL.1005 - Definitions

Noise measurement point: the noise measurement point is the point where the microphone is located.

Test (or Noise Test): designates the collection of all field measurements carried out to obtain the sound levels of the aircraft. A test comprises of several test runs.

Test run: designates only one occurrence of a test procedure, for instance one aircraft flight over the noise measurement point.

In all Subparts of the present document, “the aircraft” refers to the design to which this document is applicable as well as to the test vehicle used to satisfy the specifications set forth in this document.

SUBPART B – NOISE EVALUATION METRICS

NVTOL.1100 - Applicable noise evaluation metrics

For the take-off, overflight and approach reference procedures specified in NVTOL.1205 – Reference procedures, the noise evaluation metric is the Effective Perceived Noise Level (EPNL) measured in EPNdB, as defined in NVTOL.1105 - Calculation of Effective Perceived Noise Level.

The A-weighted continuous sound pressure level (L_{Aeq}) as defined in NVTOL.1110 - Calculation of A-weighted continuous sound pressure level is used for the hover procedure specified in NVTOL.1205 – Reference procedures.

NVTOL.1105 - Calculation of Effective Perceived Noise Level

(a) General

- (1) The metric used to quantify the certificated noise level in the take-off, overflight and approach procedures of NVTOL.1205 – Reference procedures is the Effective Perceived Noise Level (EPNL) expressed in units of EPNdB.
- (2) The noise levels are first acquired as instantaneous sound pressure levels in spectra composed of 24 one-third octave bands, which are obtained for each one-half second increment of time throughout the duration over which the aircraft noise is measured, using SLOW-time weighting. Specifications for one-third octave band filters are found in NVTOL.15–5 - Analysis system.
- (3) The EPNL calculation procedure consists of the five following steps:
 - (i) Each of the 24 one-third octave band sound pressure levels in each measured one-half second spectrum is converted to perceived noisiness by the method in paragraph (g) of NVTOL.1105 - Calculation of Effective Perceived Noise Level. The noy values are combined and then converted to instantaneous perceived noise level, PNL(k), at the k^{th} instant of time, by the method of paragraph (b) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.
 - (ii) For each spectrum a tone correction factor, C(k), is then calculated by the method of paragraph (c) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.
 - (iii) The tone correction factor is added to the perceived noise level to obtain the Tone Corrected Perceived Noise Level, PNLT(k), for each spectrum:
$$\text{PNLT}(k) = \text{PNL}(k) + C(k).$$
 - (iv) From the history of PNLT(k) noise levels, the maximum value PNLT_M is determined by the method of paragraph (d) of NVTOL.1105 - Calculation of Effective Perceived Noise Level and the noise duration is determined by the method of paragraph (e) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.

- (v) The Effective Perceived Noise Level, EPNL, is determined by logarithmic summation of the PNL levels over the noise duration and by normalizing the duration to 10 seconds, by the method of paragraph (f) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.

(b) Perceived Noise Level

Instantaneous Perceived Noise Levels, PNL(k) (with unit “PNdB”), are calculated from instantaneous one-third octave band Sound Pressure Levels, SPL(l,k), where l represents the index of the one-third octave band starting from 50 Hz (l=1 for the band centred at 50Hz, l=24 for the band centred at 10 kHz), according to the following steps:

- (i) Step 1: Convert each one-third octave band, SPL(l,k), from 50 to 10,000 Hz, to Perceived Noisiness, PN(l,k), by reference to the mathematical formulation of paragraph (g) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.
- (ii) Step 2: the value of Total Perceived Noisiness TPN(k) is obtained at every kth instant of time from the Perceived Noisiness PN(l,k) of Step 1 through the following formula, where PN_{max}(k) is the largest of the 24 values of PN(l,k) along its first dimension.

$$TPN(k) = 0.85 PN_{\max}(k) + 0.15 \sum_{l=1}^{24} PN(l, k)$$

- (iii) Step 3: the Total Perceived Noisiness TPN(k) is converted into Perceived Noise Level, PNL(k), via the following formula:

$$PNL(k) = 40.0 + 10/\log_{10}(2) \times \log_{10}(TPN(k))$$

(c) Corrections for spectral irregularities

The correction factor C(k) is calculated as follows:

- (i) Step 1: the changes in Sound Pressure Level, “s”, are calculated as follows:

$$s(1,k) = \text{no value}$$

$$s(2,k) = SPL(2,k) - SPL(1,k)$$

...

$$s(l,k) = SPL(l,k) - SPL(l-1,k)$$

...

$$s(24,k) = SPL(24,k) - SPL(23,k)$$

- (ii) Step 2: the value of the slope, s(l,k), where the absolute value of the change in slope is greater than five, is highlighted; that is, where:

$$|\Delta s(l,k)| = |s(l,k) - s(l-1,k)| > 5.$$

- (iii) Step 3:

(A) If the highlighted value of the slope s(l,k) is positive and algebraically greater than the slope s(l-1,k), then SPL(l,k) is highlighted.

(B) If the highlighted value of the slope s(l,k) is zero or negative and the slope s(l-1,k) is positive, SPL(l-1,k) is highlighted.

- (iv) Step 4: the new adjusted Sound Pressure Levels, SPL'(l,k), is computed as follows:

(A) For Sound Pressure Levels that were not highlighted, the new Sound Pressure Levels is set equal to the original Sound Pressure Levels: SPL'(l,k) = SPL(l,k).

(B) For highlighted Sound Pressure Levels in bands 1 to 23 inclusive, the new Sound Pressure Levels are calculated as follows:

$$SPL'(l,k) = \frac{1}{2} [SPL(l-1,k) + SPL(l+1,k)].$$

- (C) If the Sound Pressure Level in the highest frequency band ($l=24$) is highlighted, then the new Sound Pressure Level in that band is calculated as follows:

$$SPL'(24,k) = SPL(23,k) + s(23,k).$$

- (v) Step 5: new slopes “ s' ”, including one for a virtual 25th band, are calculated as follows:

$$s'(1,k) = s'(2,k)$$

$$s'(2,k) = SPL'(2,k) - SPL'(1,k)$$

...

$$s'(l,k) = SPL'(l,k) - SPL'(l-1,k)$$

...

$$s'(24,k) = SPL'(24,k) - SPL'(23,k)$$

$$s'(25,k) = s'(24,k)$$

- (vi) Step 6: for l from 1 to 23, the arithmetic average of the three adjacent slopes, “ \bar{s} ”, is computed as follows: $\bar{s}(l,k) = 1/3 [s'(l,k) + s'(l+1,k) + s'(l+2,k)]$

- (vii) Step 7: the final broadband one-third octave-band sound pressure levels, “ $SPL''(l,k)$ ”, from band number 1 to band number 24, are computed as follows:

$$SPL''(1,k) = SPL(1,k)$$

$$SPL''(2,k) = SPL''(1,k) + \bar{s}(1,k)$$

...

$$SPL''(l,k) = SPL''(l-1,k) + \bar{s}(l-1,k)$$

...

$$SPL''(24,k) = SPL''(23,k) + \bar{s}(23,k)$$

- (viii) Step 8: the differences between the original sound pressure level and the final broadband sound pressure level, “ $F(l,k)$ ”, is computed as follows:

$$F(l,k) = SPL(l,k) - SPL''(l,k)$$

The values of F equal to or greater than 1.5 is noted.

- (ix) Step 9: from band number $l=1$ to band number $l=24$, the tone correction factors are determined from the values of $F(l,k)$ and Table 1.

- (x) Step 10: the tone correction factor $C(k)$ is determined by taking the largest value of the tone correction factors determined in Step 9.

| Frequency f , Hz | Level difference $F(l,k)$, dB | Tone correction C , dB |
|---------------------------|--------------------------------------|--------------------------------|
| $50 \leq f < 500$ | $1.5 \leq F < 3$ | $F/3 - 0.5$ |
| | $3 \leq F < 20$ | $F/6$ |
| | $20 \leq F$ | 3.333 |
| $500 \leq f \leq 5\,000$ | $1.5 \leq F < 3$ | $2 F/3 - 1$ |
| | $3 \leq F < 20$ | $F/3$ |
| | $20 \leq F$ | 6.666 |
| $5\,000 < f \leq 10\,000$ | $1.5 \leq F < 3$ | $F/3 - 0.5$ |

| | |
|-----------------|-------|
| $3 \leq F < 20$ | F/6 |
| $20 \leq F$ | 3.333 |

Table 1: Tone Correction factors

(d) Maximum tone corrected perceived noise level

- (1) The maximum tone corrected perceived noise level, PNLTM, is the maximum value of PNLTK (with unit “TPNdB”) specified in paragraph (a)(3)(iv) of NVTOL.1105 - Calculation of Effective Perceived Noise Level, adjusted if necessary for the presence of bandsharing by the method of paragraph (d)(2) of NVTOL.1105 - Calculation of Effective Perceived Noise Level. The instant of time associated with PNLTM is designated as k_M .
- (2) If the value of the tone correction factor $C(k_M)$ for the spectrum associated with PNLTM is less than the average value of $C(k)$ for the five consecutive spectra (k_M-2) through (k_M+2), then the average value C_{avg} is used to compute a bandsharing adjustment, Δ_B , and a value of PNLTM adjusted for bandsharing, according to the formulation below:

$$C_{avg} = [C(k_M-2) + C(k_M-1) + C(k_M) + C(k_M+1) + C(k_M+2)] / 5$$
 If $C_{avg} > C(k_M)$, then $\Delta_B = C_{avg} - C(k_M)$ and $PNLTM = PNLTK(k_M) + \Delta_B$
- (3) The value of PNLTM adjusted for bandsharing is used for the calculation of EPNL.

(e) Noise duration

- (1) The limits of the noise duration bounded by the first and last 10 dB-down points are determined as follows:
 - (i) The first 10 dB-down point is identified by considering the earliest value of PNLTK which is greater than PNLTM - 10 dB. If the value of PNLTK corresponding to the preceding point is closer to PNLTM - 10 dB than the former value, then it is identified as the first 10 dB down-point instead. The associated time increment is designated as k_F .
 - (ii) The last 10 dB-down point is identified by considering the last value of PNLTK which is greater than PNLTM - 10 dB. If the value of PNLTK corresponding to the following point is closer to PNLTM - 10 dB than the former value, then it is identified as the last 10 dB down-point instead. The associated time increment is designated as k_L .
- (2) The noise duration in seconds is equal to the number of PNLTK values from k_F to k_L inclusive, times 0.5.

(f) Effective Perceived Noise Level (EPNL)

The EPNL is obtained by the following summation expression, where $t_0 = 10$ seconds, Δt is the time increment between two samples, and k_F , k_L and $PNLT(k)$ are defined previously:

$$EPNL = 10 \log_{10} \frac{1}{t_0} \sum_{k_F}^{k_L} 10^{0.1 PNL T(k)} \Delta t$$

(g) Mathematical formulation of noy tables

The relationship between Sound Pressure Level and the base-10 logarithm of Perceived Noisiness PN is derived from Table 2 and Figure 1, where the following equations are used:

- When $SPL \geq SPL(a)$, $PN = 10^{M(c) [SPL - SPL(c)]}$.
- When $SPL(b) \leq SPL < SPL(a)$, $PN = 10^{M(b) [SPL - SPL(b)]}$.
- When $SPL(e) \leq SPL < SPL(b)$, $PN = 0.3 \times 10^{M(e) [SPL - SPL(e)]}$.
- When $SPL(d) \leq SPL < SPL(e)$, $PN = 0.1 \times 10^{M(d) [SPL - SPL(d)]}$.

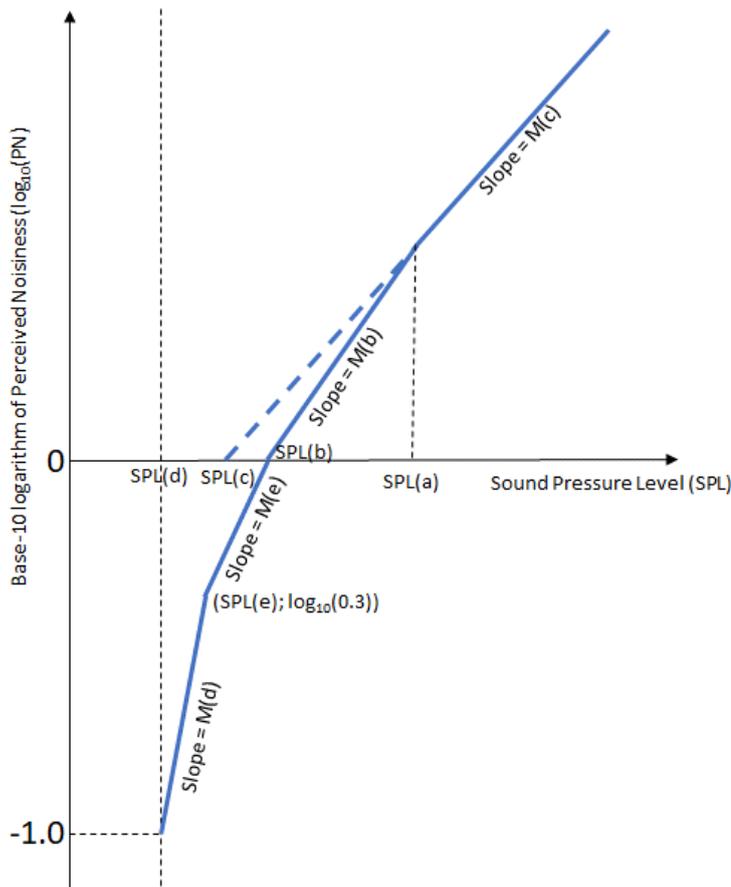


Figure 1: Perceived Noisiness as a function of Sound Pressure Level

| BAND (l) | ISO BAND | Frequency [Hz] | SPL(a) | SPL(b) | SPL(c) | SPL(d) | SPL(e) | M(b) | M(c) | M(d) | M(e) |
|----------|----------|----------------|--------|--------|--------|--------|--------|----------|--------------------------|----------|----------|
| 1 | 17 | 50 | 91.0 | 64 | 52 | 49 | 55 | 0.043478 | 0.030103 | 0.079520 | 0.058098 |
| 2 | 18 | 63 | 85.9 | 60 | 51 | 44 | 51 | 0.040570 | 0.030103 | 0.068160 | 0.058098 |
| 3 | 19 | 80 | 87.3 | 56 | 49 | 39 | 46 | 0.036831 | 0.030103 | 0.068160 | 0.052288 |
| 4 | 20 | 100 | 79.0 | 53 | 47 | 34 | 42 | 0.036831 | 0.030103 | 0.059640 | 0.047534 |
| 5 | 21 | 125 | 79.8 | 51 | 46 | 30 | 39 | 0.035336 | 0.030103 | 0.053013 | 0.043573 |
| 6 | 22 | 160 | 76.0 | 48 | 45 | 27 | 36 | 0.033333 | 0.030103 | 0.053013 | 0.043573 |
| 7 | 23 | 200 | 74.0 | 46 | 43 | 24 | 33 | 0.033333 | 0.030103 | 0.053013 | 0.040221 |
| 8 | 24 | 250 | 74.9 | 44 | 42 | 21 | 30 | 0.032051 | 0.030103 | 0.053013 | 0.037349 |
| 9 | 25 | 315 | 94.6 | 42 | 41 | 18 | 27 | 0.030675 | 0.030103 | 0.053013 | 0.034859 |
| 10 | 26 | 400 | ∞ | 40 | 40 | 16 | 25 | 0.030103 | ↑ Not applicable ↓ | 0.053013 | 0.034859 |
| 11 | 27 | 500 | ∞ | 40 | 40 | 16 | 25 | 0.030103 | | 0.053013 | 0.034859 |
| 12 | 28 | 630 | ∞ | 40 | 40 | 16 | 25 | 0.030103 | | 0.053013 | 0.034859 |
| 13 | 29 | 800 | ∞ | 40 | 40 | 16 | 25 | 0.030103 | | 0.053013 | 0.034859 |
| 14 | 30 | 1000 | ∞ | 40 | 40 | 16 | 25 | 0.030103 | | 0.053013 | 0.034859 |
| 15 | 31 | 1250 | ∞ | 38 | 38 | 15 | 23 | 0.030103 | | 0.059640 | 0.034859 |
| 16 | 32 | 1600 | ∞ | 34 | 34 | 12 | 21 | 0.029960 | | 0.053013 | 0.040221 |
| 17 | 33 | 2000 | ∞ | 32 | 32 | 9 | 18 | 0.029960 | | 0.053013 | 0.037349 |
| 18 | 34 | 2500 | ∞ | 30 | 30 | 5 | 15 | 0.029960 | | 0.047712 | 0.034859 |
| 19 | 35 | 3150 | ∞ | 29 | 29 | 4 | 14 | 0.029960 | | 0.047712 | 0.034859 |
| 20 | 36 | 4000 | ∞ | 29 | 29 | 5 | 14 | 0.029960 | 0.053013 | 0.034859 | |
| 21 | 37 | 5000 | ∞ | 30 | 30 | 6 | 15 | 0.029960 | 0.053013 | 0.034859 | |
| 22 | 38 | 6300 | ∞ | 31 | 31 | 10 | 17 | 0.029960 | 0.029960 | 0.068160 | 0.037349 |
| 23 | 39 | 8000 | 44.3 | 37 | 34 | 17 | 23 | 0.042285 | 0.029960 | 0.079520 | 0.037349 |
| 24 | 40 | 10000 | 50.7 | 41 | 37 | 21 | 29 | 0.042285 | 0.029960 | 0.059640 | 0.043573 |

Table 2: Constants for mathematically formulated noy values

MoC1 NVTOL.1105 - Calculation of Effective Perceived Noise Level

TONE CORRECTION FACTOR

Paragraph (a)(3)(iii) of NVTOL.1105 - Calculation of Effective Perceived Noise Level specifies how to calculate the tone correction factor. Additionally, for any l^{th} one-third octave band, at any k^{th} increment of time, for which the tone correction factor is suspected to result from something other than (or in addition to) an actual tone (or any spectral irregularity other than noise generated by the aircraft), an additional analysis may be made using a filter with a bandwidth narrower than one-third of an octave. If the narrow band analysis corroborates these suspicions, then a revised value for the “new broadband sound pressure level” of Step 4 in paragraph (c) of NVTOL.1105 - Calculation of Effective Perceived Noise Level, $SPL'(l,k)$, should be determined from the narrow band analysis and used to compute a revised tone correction factor for that particular one-third octave band.

IM1 NVTOL.1105 - Calculation of Effective Perceived Noise Level

NOISE DURATION

Figure 2 provides an example to illustrate the selection of the first and last 10 dB-down points, k_F and k_L , specified in paragraph (e)(1) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.

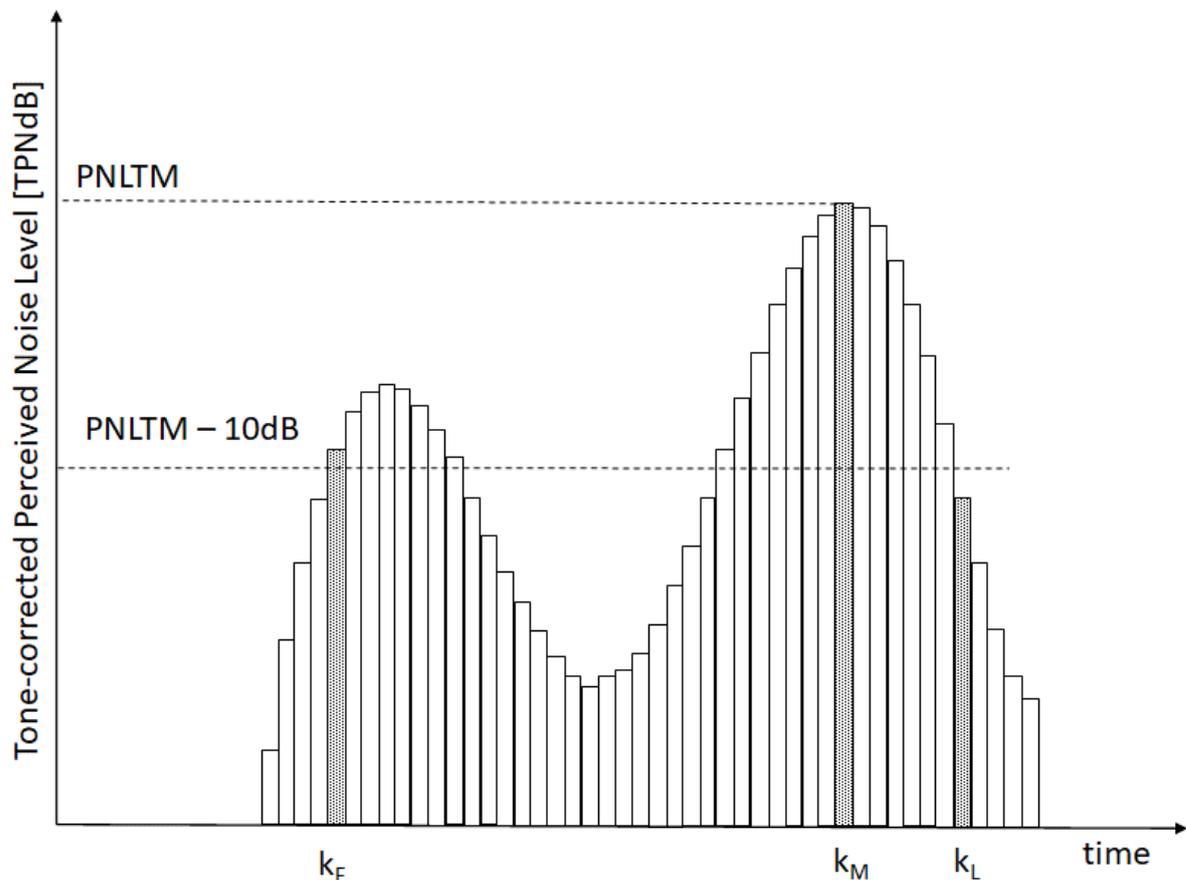


Figure 2: Example of a noise time history

NVTOL.1110 - Calculation of A-weighted continuous sound pressure level

The A-weighted equivalent continuous sound pressure level, L_{Aeq} , is defined as the level, in dB(A), of the time integral of squared A-weighted sound pressure, p_A , over a given time period, with reference to the square of the standard reference sound pressure, p_0 , of 20 μ Pa and a reference duration of one second.

This metric is calculated by the following equation:

$$L_{Aeq} = 10 \cdot \log_{10} \frac{1}{t_M} \sum_{k=1}^N \sum_{l=1}^{24} 10^{0.1SPL_{AS}(l,k)} \Delta t$$

where:

- $SPL_{AS}(l,k)$ is the time varying A-frequency-weighted SLOW-time-weighted one-third-octave-banded sound pressure level in dB(A) measured at the k^{th} instant of time in the l^{th} one-third octave frequency band. Specifications for one-third octave band filters are specified in NVTOL.15-5 - Analysis system.
- N is the last increment of k corresponding to the duration of $t_M=30$ seconds,
- Δt is the time increment between samples, and
- The A-frequency weighting correction curve is defined in the IEC 61672-1 (“Electroacoustics — Sound level meters — Part I: Specifications”, 2013).

SUBPART C – REFERENCE CONDITIONS AND PROCEDURES

NVTOL.1200 - Reference noise measurement points

- (a) For the take-off reference procedure,
- (1) the central reference noise measurement point is located on the ground, vertically below the flight path defined in the take-off reference procedure of NVTOL.1205 – Reference procedures and 500 m horizontally in the direction of flight from the point at which transition to climbing flight is initiated.
 - (2) two lateral reference measurement points are located on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the take-off reference procedure NVTOL.1205 – Reference procedures and lying on a line through the central reference noise measurement point.
- (b) For the overflight reference procedure,
- (1) the central reference noise measurement point is located on the ground, vertically below the flight path defined in the overflight reference procedure of NVTOL.1205 – Reference procedures and 150 m vertically below the flight path defined in the overflight reference procedure.
 - (2) two lateral reference measurement points are located on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the overflight reference procedure NVTOL.1205 – Reference procedures and lying on a line through the central reference noise measurement point.
- (c) For the approach reference procedure,
- (1) the central reference noise measurement point is located on the ground, vertically below the flight path defined in the approach reference procedure of NVTOL.1205 – Reference procedures and 120 m vertically below the flight path defined in the approach reference procedure.
 - (2) two lateral reference measurement points are located on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the approach reference procedure NVTOL.1205 – Reference procedures and lying on a line through the central reference noise measurement point.
- (d) For the hover reference procedure, an array of twelve reference noise measurement points is defined as follows:
- (1) the origin of the measurement array is defined on the ground, at a height of $H=50$ m vertically below the stationary flight path defined in the hover reference procedure of NVTOL.1205 – Reference procedures.
 - (2) a first set of three reference noise measurement points is located on the ground, aligned in the same direction, at distances of $1.73 \times H$, $2.75 \times H$ and $3.73 \times H$ from the origin of the measurement array, where $H=50$ m.
 - (3) Three other sets of three reference noise measurement points each are located on the ground by rotating the first set of reference noise measurement points respectively by 90° , 180° and 270° about the normal from the ground at the origin of the measurement array.

IM1 NVTOL.1200 - Reference noise measurement points

HOVER REFERENCE NOISE MEASUREMENT POINT

Figure 3 and Figure 4 depict the arrangement of the 12 reference noise measurement of the hover procedure. Alternatively, for logistical reasons, a setup with only three aligned microphones might be considered according to the depiction of Figure 3, where the applicant would then acquire three times more test points whereby the heading of the aircraft is rotated by steps of 90° about the line of mics specified in (2).

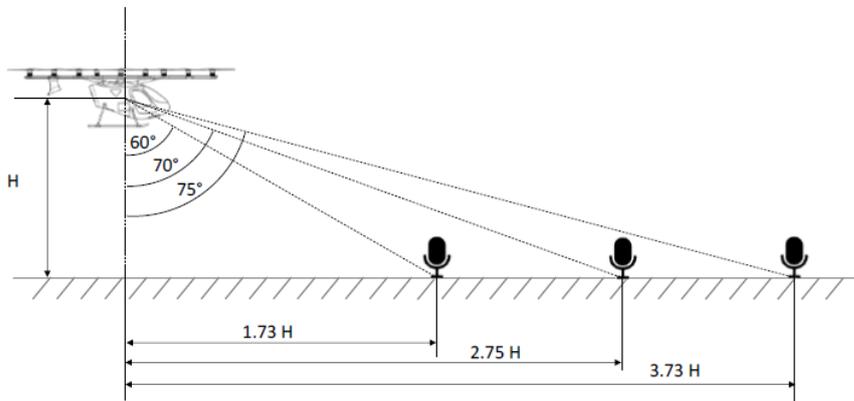


Figure 3: side view of the reference noise measurement points of the hover procedure

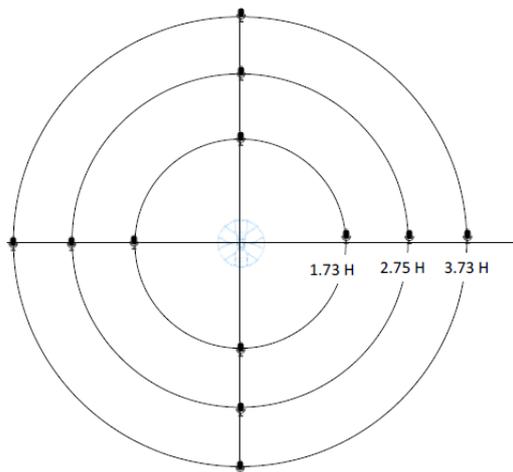


Figure 4: top view of the reference noise measurement points of the hover procedure

NVTOL.1205 – Reference procedures

- (a) The noise levels are determined under the reference atmospheric conditions defined in NVTOL.1210 - Reference atmospheric conditions for the reference procedures specified in (c), (d), (e) and (f).
- (b) In the reference procedures specified in (c), (d), (e) and (f), the point on the aircraft to use for the purpose of positioning the vehicle with respect to the reference noise measurement points is specified as follows:
- (1) On the horizontal plane, the “centre of the smallest enclosing circle” as defined in Subpart B, MOC VTOL.2105, Section 8 of the Second Publication of Proposed Means of Compliance with the Special Condition VTOL².
 - (2) On the vertical plane, the vertical position of the centre of gravity.
- (c) The take-off reference procedure is defined as follows:
- (1) the reference level-flight profile is defined for a flat terrain throughout the entire flight path;
 - (2) the aircraft is stabilized at the power for maximum climb rate with the batteries at maximum State of Charge in the reference atmospheric condition specified in NVTOL.1210 - Reference atmospheric conditions along a path starting from a point located 500 m prior to the take-off central reference noise measurement point defined in paragraph (a) of NVTOL.1200 - Reference noise measurement points, at 20 m above the ground;
 - (3) the best rate of climb speed, V_y , or the lowest approved speed for the climb after take-off, whichever is the greater, is maintained throughout the take-off reference procedure;
 - (4) each rotor is set to its maximum rpm that allows maintaining a steady climb;
 - (5) the mass of the aircraft is the maximum take-off mass at which noise certification is requested; and
 - (6) the reference take-off path is defined as a straight-line segment inclined from the starting point (500 m prior to the centre microphone location and 20 m above ground level) at an angle defined by best rate of climb and V_y for minimum individual specification engine performance.
- (d) The overflight reference procedure is defined as follows:
- (1) the reference level-flight profile is defined for a flat terrain throughout the entire flight path;
 - (2) the aircraft is stabilized in level flight overhead the overflight central reference noise measurement point defined in paragraph (b) of NVTOL.1200 - Reference noise measurement points at a height of 150 m;
 - (3) a speed of $0.9 V_H$ or $0.9 V_{NE}$ or $0.45 V_H + 120 \text{ km/h}$ ($0.45 V_H + 65 \text{ kt}$) or $0.45 V_{NE} + 120 \text{ km/h}$ ($0.45 V_{NE} + 65 \text{ kt}$), whichever is the least, is maintained throughout the overflight reference procedure, where V_H is defined as the airspeed in level flight obtained using maximum continuous power available for sea level pressure (1 013.25 hPa), 25°C ambient conditions at the relevant maximum certificated mass, and V_{NE} is defined as the not-to-exceed airworthiness airspeed imposed by the

² [Second Publication of Proposed Means of Compliance with the Special Condition VTOL, European Union Aviation Safety Agency, Doc. No: MOC-2 SC-VTOL, Issue 1, June 2021.](#)

manufacturer and approved by the Agency. The values of V_H and/or V_{NE} used for noise certification are the ones quoted in the approved flight manual;

- (4) the overflight is made with each rotor speed stabilized at the maximum normal operating rpm certificated for level flight;
 - (5) the mass of the aircraft is the maximum take-off mass at which noise certification is requested.
- (e) The approach reference procedure is defined as follows:
- (1) the reference level-flight profile is defined for a flat terrain throughout the entire flight path;
 - (2) the aircraft is stabilized and following a 6.0° approach path;
 - (3) the approach is made at a stabilized airspeed equal to the best rate of climb speed, V_y , or the lowest approved speed for the approach, whichever is the greater, with power stabilized during the approach and over the flight path reference point, and continued to a normal touchdown;
 - (4) each rotor is set to its maximum rpm that allows maintaining a steady approach;
 - (5) the mass of the aircraft at touchdown is the maximum landing mass at which noise certification is requested.
- (f) The hover reference procedure is defined as follows:
- (1) the aircraft is stabilized in a stationary flight directly above the origin of the measurement array specified in paragraph (d)(1) of NVTOL.1200 - Reference noise measurement points at the reference height of 50 m;
 - (2) the aircraft is set to its MTOM.
- (g) When the applicant demonstrates that the design characteristics of the aircraft would prevent conducting the flight in accordance with the reference procedures defined in (b), (c), (e), or (f), the noise test procedures should:
- (1) only depart from the reference procedures to the extent demanded by those design characteristics which make satisfying the reference procedures impossible;. be agreed with the Agency.

NVTOL.1210 - Reference atmospheric conditions

The reference atmospheric conditions for the reference procedures defined in NVTOL.1205 – Reference procedures are defined as follows:

- (a) sea level atmospheric pressure of 1,013.25 hPa;
- (b) ambient air temperature of 25°C ;
- (c) relative humidity of 70 per cent;
- (d) zero wind.

| | | |
|--|--|--|
|  <p>EASA European Union Aviation Safety Agency</p> | <p>Consultation Paper</p> <p>Environmental Protection Technical Specifications applicable to eVTOL powered by multiple, vertical, non-tilting, evenly distributed rotors</p> | <p>Issue : 1</p> <p>Date : 04 May 2023</p> <p>Proposed <input checked="" type="checkbox"/> Final <input type="checkbox"/></p> <p>Deadline for comments: 15 June 2023</p> |
|--|--|--|

SUBPART D – MAXIMUM ALLOWABLE NOISE LEVELS

For the take-off reference procedure, the maximum value for $EPNL_{TOref}$, specified in paragraph (c)(1) of NVTOL.1605 – Satisfying maximum allowable noise levels, is set at 106 EPNdB for the aircraft with maximum certificated take-off mass of 80,000 kg and over, and decreasing linearly with the base-10 logarithm of the aircraft maximum certificated take-off mass at a rate of 3 EPNdB per halving of mass down to 86 EPNdB, after which the limit is constant.

For the overflight reference procedure, the maximum value of $EPNL_{OVref}$, specified in paragraph (d)(1) of NVTOL.1605 – Satisfying maximum allowable noise levels, is set at 104 EPNdB for the aircraft with maximum certificated take-off mass of 80,000 kg and over, and decreasing linearly with the base-10 logarithm of the aircraft maximum certificated take-off mass at a rate of 3 EPNdB per halving of mass down to 84 EPNdB, after which the limit is constant.

For the approach reference procedure, the maximum value of $EPNL_{APref}$, specified in paragraph (e)(1) of NVTOL.1605 – Satisfying maximum allowable noise levels, is set at 109 EPNdB for the aircraft with maximum certificated take-off mass of 80,000 kg and over, and decreasing linearly with the base-10 logarithm of the aircraft maximum certificated take-off mass at a rate of 3 EPNdB per halving of mass down to 89 EPNdB, after which the limit is constant.

For the hover procedure adjustments specified in paragraph (f) of NVTOL.1605 – Satisfying maximum allowable noise levels, there is no maximum noise level.

IM1 SUBPART D Maximum Allowable Noise Levels

Table 3 summarises the maximum allowable noise levels of the aircraft specified in Subpart D.

| M = Maximum take-off mass in 1 000 kg | 0 | 0.788 | 80.0 | |
|---------------------------------------|----|--------------------------------|------|-----|
| Take-off noise level (EPNdB) | 86 | $87.0314 + 9.9673 \log_{10} M$ | | 106 |
| Overflight noise level (EPNdB) | 84 | $85.0314 + 9.9673 \log_{10} M$ | | 104 |
| Approach noise level (EPNdB) | 89 | $90.0314 + 9.9673 \log_{10} M$ | | 109 |

Table 3: maximum allowable noise levels of the aircraft as a function of MTOM



SUBPART E – NOISE TEST

NVTOL.1400 - Test environment conditions

- (a) For the take-off, overflight and approach procedures specified respectively in paragraphs (c), (d) and (e) of NVTOL.1205 – Reference procedures, three noise measurement points are set up at the locations of the three reference noise measurements points specified in paragraphs (a), (b) and (c) of NVTOL.1200 - Reference noise measurement points respectively (one central and two lateral points).
- (b) For the hover procedure specified in paragraph (f) of NVTOL.1205 – Reference procedures, twelve noise measurement points are set up at the locations specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points. If, after coordination with the Agency, the test target height differs from the value of H specified in paragraph (f) of NVTOL.1205 – Reference procedures, the distances between microphones and centre of the array should be adapted following this updated test target height in the specifications of paragraph (d) of NVTOL.1200 - Reference noise measurement points.
- (c) The noise measurement points should be located on a flat terrain having no excessive sound absorption characteristics.
- (d) If the noise measurement points are located on grass, the grass should be mowed below 8 cm of height on a minimum radius of 7.5 m around every noise measurement point.
- (e) If snow is present on the test site area, it should be completely cleared on a minimum radius of 15 m around every noise measurement point. Additionally, snow should not be piled up at the borders of this cleared area.
- (f) The conical space above each noise measurement point defined by an axis normal to the ground and by a half-angle of 80° from this axis should be free of obstructions that could influence the propagation of noise between aircraft and microphones.
- (g) The temperature, the relative humidity, the wind speed and direction and the atmospheric pressure should be measured for each run:
 - (1) at a height of 10 m above the ground level;
 - (2) within 2,000 m of the central microphone location defined in (a);
 - (3) temperature and relative humidity should be measured within 30 seconds of the aircraft flight across the microphone line for the take-off, overflight and approach procedures specified in paragraphs (c), (d) and (e) of NVTOL.1205 – Reference procedures, and within 30 seconds of the beginning or end of the hover noise measurement for the procedure specified in paragraph (f) of NVTOL.1205 – Reference procedures.
 - (4) the wind speed and direction should be measured at a sample rate of at least 2 Hz during all noise measurements.
- (h) The meteorological instruments should be operated within their environmental limitations as specified by their manufacturer.
- (i) The requested accuracy of the temperature and the relative humidity sensors should be equal to or better than the following values:

- (1) $\pm 0.5^{\circ}\text{C}$ for the temperature;
 - (2) $\pm 3\%$ for the relative humidity or $\pm 0.5^{\circ}\text{C}$ for both the dry bulb and the dew point temperatures when the relative humidity is measured with a psychrometer.
- (j) The test should be carried out under the following atmospheric conditions:
- (1) no precipitation;
 - (2) the ambient air temperature should not be greater than 35°C and should not be less than -10°C over the sound propagation path between a point 10 m above the ground and the aircraft;
 - (3) the relative humidity should not be greater than 95 per cent and should not be less than 20 per cent over the sound propagation path between a point 10 m above the ground and the aircraft;
 - (4) the value of atmospheric absorption of sound in the 8 kHz one-third octave band, determined according to the procedure specified in MoC2 at 10 m above the ground, should not exceed 14 dB/100 m at the PNLTM of each test run;
 - (5) the average wind speed at 10 m above the ground should not exceed 5.1 m/s (10 kt);
 - (6) the average crosswind component at 10 m above the ground should not exceed 2.1 m/s (4 kt); and
 - (7) there should not be any anomalous meteorological or wind conditions that would significantly affect the measured noise levels. In particular, there should not be any temperature inversion equal or larger than 2°C during any test run (where a temperature inversion is defined as a positive difference between ambient air temperature at 10 m minus temperature at the aircraft location).

MoC1 NVTOL.1400 - Test environment conditions

METEOROLOGICAL INSTRUMENTS

The temperature can be measured with a temperature sensor that meets the tolerance Class B specifications of IEC 60751 ("Industrial platinum resistance thermometers and platinum temperature sensors", 2nd edition, July 2008). The accuracy of such a sensor is equal to or better than $\pm 0.5^{\circ}\text{C}$.

MoC2 NVTOL.1400 - Test environment conditions

DETERMINATION OF COEFFICIENTS OF ATMOSPHERIC ABSORPTION OF SOUND

The reduction in level of sound within the l^{th} one-third octave band, $\alpha(l)$, in dB per 100 metres, due to the effects of atmospheric absorption of sound, is determined from the following equation:

$$\alpha(l) = 10^{[2.05 \log_{10}(f_0/1000) + 1.1394 \times 10^{-3}\theta - 1.916984]} + \eta(\delta) \times 10^{[\log_{10}(f_0) + 8.42994 \times 10^{-3}\theta - 2.755624]}$$

$$\text{where } \delta = \sqrt{\frac{1010}{f_0}} 10^{(\log_{10} \text{RH} - 1.328924 + 3.179768 \times 10^{-2}\theta)} \times 10^{(-2.173716 \times 10^{-4}\theta^2 + 1.7496 \times 10^{-6}\theta^3)}$$

θ is the temperature in $^{\circ}\text{C}$ and RH is the relative humidity expressed as a percentage. They are obtained from the specifications of paragraph (g) of NVTOL.1400 - Test environment conditions. The values of $\eta(\delta)$ and f_0 are provided respectively in Table 4 and Table 5. The values of $\eta(\delta)$ are determined from Table 4 through quadratic interpolation.

Consultation Paper

Environmental Protection Technical Specifications applicable to eVTOL powered by multiple, vertical, non-tilting, evenly distributed rotors

Issue : 1
 Date : 04 May 2023
 Proposed Final
 Deadline for comments: 15 June 2023

| δ | $\eta(\delta)$ | δ | $\eta(\delta)$ |
|----------|----------------|----------|----------------|
| 0.00 | 0.000 | 2.50 | 0.450 |
| 0.25 | 0.315 | 2.80 | 0.400 |
| 0.50 | 0.700 | 3.00 | 0.370 |
| 0.60 | 0.840 | 3.30 | 0.330 |
| 0.70 | 0.930 | 3.60 | 0.300 |
| 0.80 | 0.975 | 4.15 | 0.260 |
| 0.90 | 0.996 | 4.45 | 0.245 |
| 1.00 | 1.000 | 4.80 | 0.230 |
| 1.10 | 0.970 | 5.25 | 0.220 |
| 1.20 | 0.900 | 5.70 | 0.210 |
| 1.30 | 0.840 | 6.05 | 0.205 |
| 1.50 | 0.750 | 6.50 | 0.200 |
| 1.70 | 0.670 | 7.00 | 0.200 |
| 2.00 | 0.570 | 10.00 | 0.200 |
| 2.30 | 0.495 | | |

Table 4: Values of $\eta(\delta)$

| Centre frequency of the 1/3 octave band [Hz] | f_0 [Hz] | Centre frequency of the 1/3 octave band [Hz] | f_0 [Hz] |
|--|------------|--|------------|
| 50 | 50 | 800 | 800 |
| 63 | 63 | 1 000 | 1 000 |
| 80 | 80 | 1 250 | 1 250 |
| 100 | 100 | 1 600 | 1 600 |
| 125 | 125 | 2 000 | 2 000 |
| 160 | 160 | 2 500 | 2 500 |
| 200 | 200 | 3 150 | 3 150 |
| 250 | 250 | 4 000 | 4 000 |
| 315 | 315 | 5 000 | 4 500 |
| 400 | 400 | 6 300 | 5 600 |
| 500 | 500 | 8 000 | 7 100 |
| 630 | 630 | 10 000 | 9 000 |

Table 5: Values of f_0

IM1 NVTOL.1400 - Test environment conditions

NOISE MEASUREMENT CONDITIONS

Thick, matted, tall grass, shrubs, or wooded areas are terrains that absorb sound excessively and should be avoided. In addition, people who carry out the measurements should avoid constituting an obstruction that significantly influences the sound measurement.

NVTOL.1405 - Flight test procedures

- (a) The aircraft used for the test should conform to its production design. Any deviation of the test aircraft to its production design regarding components or features that might affect its noise characteristics should be accepted by the Agency.
- (b) The aircraft is set to its MTOM for the entire duration of the test.
- (c) For the take-off procedure:
 - (1) a minimum of six runs should be performed;
 - (2) the true airspeed should not vary from the reference airspeed appropriate to the flight demonstration by more than ± 9 km/h (± 5 kt) throughout the 10 dB-down period;
 - (3) the aircraft height above the central noise measurement point specified in paragraph (a) of NVTOL.1400 - Test environment conditions should be within +50 m, -110 m, of the reference height above the central noise reference point specified in paragraph (c) of NVTOL.1205 – Reference procedures;
 - (4) the aircraft should fly within $\pm 10^\circ$ or ± 20 m, whichever is greater, from the vertical above the reference track throughout the 10 dB-down period; and
 - (5) the rpm of each individual rotor should not vary from its average value by more than $\pm 3\%$ during the 10 dB-down period.
- (d) For the overflight procedure:
 - (1) a minimum of six runs should be performed, and the runs should be performed in equal numbers with identical tailwind and headwind components;
 - (2) the true airspeed should not vary from the reference airspeed appropriate to the flight demonstration by more than ± 9 km/h (± 5 kt) throughout the 10 dB-down period;
 - (3) the aircraft height above the central noise measurement point specified in paragraph (a) of NVTOL.1400 - Test environment conditions should be within +50 m, -110 m, of the reference height above the central noise reference point specified in paragraph (d) of NVTOL.1205 – Reference procedures;
 - (4) the aircraft should fly within $\pm 10^\circ$ or ± 20 m, whichever is greater, from the vertical above the reference track throughout the 10 dB-down period; and
 - (5) the rpm of each individual rotor should not vary from its average value by more than $\pm 3\%$ during the 10 dB-down period.
- (e) For the approach procedure:

- (1) a minimum of six runs should be performed;
 - (2) the true airspeed should not vary from the reference airspeed specified in paragraph (d)(3) of NVTOL.1205 – Reference procedures by more than ± 9 km/h (± 5 kt) throughout the 10 dB-down period;
 - (3) the aircraft height above the central noise measurement point specified in paragraph (a) of NVTOL.1400 - Test environment conditions should be within +50 m, -80 m, of the reference height above the central noise reference point specified in paragraph (e) of NVTOL.1205 – Reference procedures;
 - (4) the aircraft should fly within $\pm 10^\circ$ or ± 20 m, whichever is greater, from the vertical above the reference track throughout the 10 dB-down period; and
 - (5) the rpm of each individual rotor should not vary from its average value by more than $\pm 3\%$ during the 10 dB-down period.
- (f) For the hover procedure:
- (1) a minimum of six runs should be performed;
 - (2) the aircraft should be set to maintain a stabilized hovering position during 30 seconds at the vertical above the noise measurement point;
 - (3) the LA_{eq} results from the A-weighted SLOW-time-weighted sound level averaged over 30 seconds;
 - (4) the aircraft height above the noise measurement point, averaged over the 30 seconds of noise recording, should be between 25 m and 100 m.
 - (5) the aircraft should always remain within a 3° cone from the vertical above the noise measurement point during the 30 seconds of noise recording;
 - (6) the aircraft vertical deviation need always to be within ± 1 m from the measured height averaged over the 30 seconds of noise recording;
 - (7) the aircraft should be flown outside of the conditions specified in (5) and (6) and flown back in condition between each run.
- (g) For each run of the take-off, overflight and approach procedures, the background noise levels, when analysed in the same way and expressed in PNL (as specified in paragraph (b) of NVTOL.1105 - Calculation of Effective Perceived Noise Level), should be at least 20 PNdB below the maximum PNL of the aircraft. For each run of the hover procedure, the aircraft maximum A-frequency-weighted sound level (L_{Amax}) should be greater than the background noise A-weighted sound level by at least 15 dB(A). Any test run for which this condition is not satisfied should be invalidated.
- (h) If the condition specified in (g) should not be fulfilled, the test heights should be adapted whilst remaining within the allowable height tolerances specified in (c)(3), (d)(3), (e)(3) and (f)(4) respectively for the take-off, overflight, approach and hover procedures, or an alternative test site should be chosen to ensure appropriate noise measurements.
- (i) Additionally, the applicant should consider source noise adjustments (Δ_3) specified in paragraph (b)(9) of NVTOL.1600 - Adjustments of the measured sound levels and therefore conduct additional testing to develop at least sensitivity curves of EPNL versus TAS, or PNLTM versus TAS, or PNL versus TAS. This demands testing at different flight speeds around the reference flight speed.

- (j) A sufficient number of runs should be performed to ensure that the 90 per cent confidence interval is within $EPNL_{T0ref} \pm 1.5$ EPNdB, $EPNL_{Ovref} \pm 1.5$ EPNdB, $EPNL_{Apref} \pm 1.5$ EPNdB, and $L_{Aeqref_av} \pm 1.5$ dB(A) respectively for the take-off, overflight, approach and hover reference procedures and to ensure that the test is valid as specified in paragraph (b) of NVTOL.1605 – Satisfying maximum allowable noise levels.

MoC1 NVTOL.1405 - Flight test procedures

TEST HEIGHT AND SPEED

- (a) Differences between aircraft test and reference profiles are adjusted as specified in Subpart G for the difference in sound propagation path lengths (spherical spreading and atmospheric absorption effects), for the difference in the noise event durations, and for differences in source generation mechanisms. To minimise these adjustments, for the three measurement procedures specified in paragraphs (c), (d) and (e) of NVTOL.1405 - Flight test procedures, the target test airspeed should be set as close as possible to the reference airspeed, and for all four measurement procedures of NVTOL.1405 - Flight test procedures, the target test height should be set as close as possible to the reference height.
- (b) The targeted test heights may not be achievable due to excessive background noise and prevent the specification of paragraph (g) of NVTOL.1405 - Flight test procedures to be satisfied.

One possible means to overcome this issue is to set the aircraft at a lower target test height until the criterion of paragraph (g) of NVTOL.1405 - Flight test procedures can be met for each run (while remaining in the allowable height tolerances specified in (c)(3), (d)(3), (e)(3) and (f)(4) respectively for the take-off, overflight, approach and hover procedures, and as long as the aircraft is flown within its allowable operational range based on its design and the local restrictions at the test site). To adapt and determine the appropriate target test height, practice runs (not valid for the establishment of noise levels) should be conducted in the configuration as specified in Subpart E. Since variations in measured sound levels of up to ± 2.0 EPNdB or ± 2.0 dB(A) may occur from run to run, the difference between the aircraft sound level and background noise sound level should therefore be large enough to accommodate the anticipated quietest aircraft sound level.

MoC2 NVTOL.1405 - Flight test procedures

HOVER NOISE

Figure 5 depicts the specified boundaries of the aircraft flight path for the hover reference procedure. Paragraph (f)(7) of NVTOL.1405 - Flight test procedures specifies that, after the 30-second noise recording of every run of the hover test procedure (valid or not), the aircraft be flown outside of the allowable window depicted in grey on Figure 5, which combines the ± 1 m height window specified in paragraph (f)(6) of NVTOL.1405 - Flight test procedures and the 3°-cone specified in paragraph (f)(5) of NVTOL.1405 - Flight test procedures, before being flown back into condition and initiating the next 30-second noise recording. Under no circumstance can a continuous on-condition recording be performed and later be subdivided into 30-second recordings.

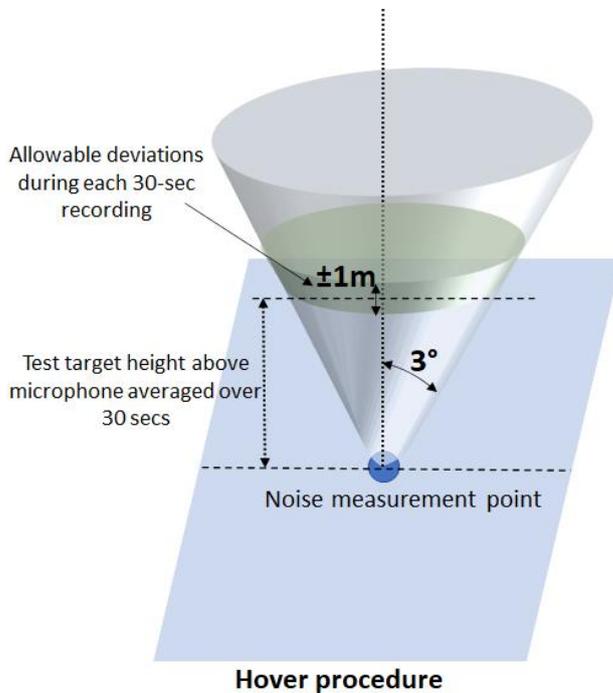


Figure 5: depiction of allowable flight boundaries for the hover procedure

IM1 NVTOL.1405 - Flight test procedures

NUMBER OF RUNS

It may happen that some runs deemed valid during the test have to be rejected upon further analysis of the data. If, at the end of this phase, the number of valid runs is found to be lower than the specified minimum number of six, or the 90 per cent confidence interval is outside of $EPNL_{TOref} \pm 1.5$ EPNdB, $EPNL_{OVref} \pm 1.5$ EPNdB, $EPNL_{APref} \pm 1.5$ EPNdB, and $L_{Aeqref_av} \pm 1.5$ dB(A) respectively for the take-off, overflight, approach and hover reference procedures, more test runs will have to be performed to fulfil those conditions. It is therefore recommended during the test to conduct additional runs to mitigate the risk of having to deploy the complete test equipment again.

IM2 NVTOL.1405 - Flight test procedures

TAKE-OFF FLIGHT TEST PROCEDURE

(a) Take-off profile

Figure 6 depicts the reference take-off profile and a possible measured take-off profile under zero-wind condition. The reference take-off profile is a straight-line segment. It starts from a defined point C_r that is 500 m from the centre noise measurement point (A) and at a height of 20 m above the ground. The reference climb angle γ_R of the straight-line path will depend on the certificated best rate of climb and V_y at the reference conditions. The reference profile ends at a point I_r which will encompass the 10 dB-down

period of the noise measurements. The position of point L along the measured take-off path corresponds to the same value of emission angle θ as point L_r on the reference take-off path ($\theta = \theta_r$) for the adjustment procedure specified in paragraph (b)(3) of NVTOL.1600 - Adjustments of the measured sound levels. Figure 6 depicts the situation where $\theta = \theta_r$ with respect to the centre noise measurement point (A), but a similar depiction, albeit with a different position of point L, would apply to the emission angles calculated with respect to the sideline noise measurement points ($S_{starboard}$ and S_{port}).

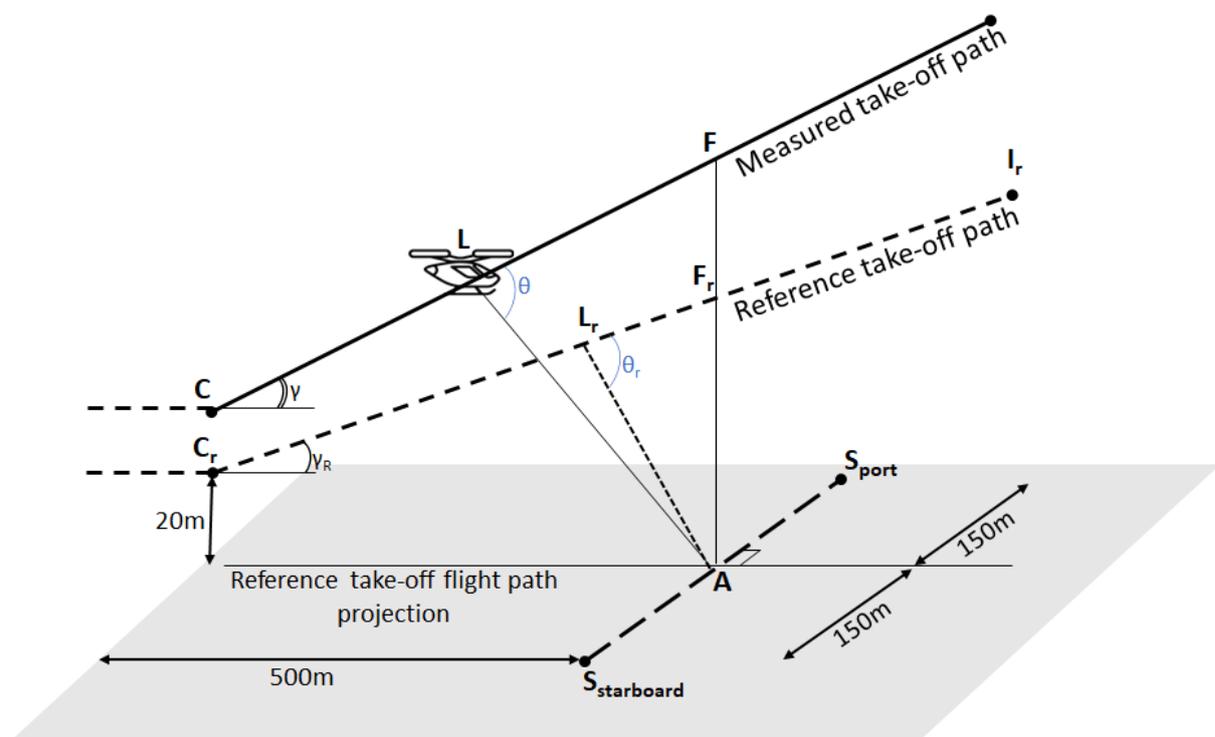


Figure 6: Comparison of measured and reference take-off profiles

The reference climb angle, γ , is based on the best rate of climb and V_y airspeed determined from approved manufacturer's data for the take-off performance of the aircraft at the reference conditions. Since airspeed is defined as being in the direction of the flight path, the climb angle γ is the arcsine of the ratio of best rate of climb to V_y .

(b) Flight test procedure

(1) Number of test runs

At least six test runs are needed with simultaneous noise measurements at each of the noise measurement points. Since it cannot be determined until the analysis is partly completed if each test run meets all the specifications of this document, the applicant will find merit in conducting additional take-off test runs. If additional test runs are conducted and more than six valid noise measurements are simultaneously obtained at all three measurement points, then the results of such test runs also should be included in the averaging process for calculating EPNL.

(2) Horizontal and Vertical adjustment of climb initiation

| | | |
|--|--|--|
|  <p>EASA European Union Aviation Safety Agency</p> | <p>Consultation Paper</p> <p>Environmental Protection Technical Specifications applicable to eVTOL powered by multiple, vertical, non-tilting, evenly distributed rotors</p> | <p>Issue : 1 Date : 04 May 2023 Proposed <input checked="" type="checkbox"/> Final <input type="checkbox"/> Deadline for comments: 15 June 2023</p> |
|--|--|--|

In coordination with the Agency, Position C on Figure 6, or the height of the initial level flight may also be varied to fulfil the specification of paragraph (g) of NVTOL.1405 - Flight test procedures.

(3) Practice flights

The applicant may find it helpful, if not essential, to conduct a number of practice or pre-noise certification test runs to adjust the height/location of Position C. With prior approval of the Agency, these practice runs can be excluded from the noise evaluation. These runs should also be documented in the noise certification report as practice flights.

(4) Rotor speed

The rotational speeds of each rotor are the maximum value that can be maintained at the reference take-off airspeed while maintaining a steady flight. If multiple rotor speeds can be used for normal operations, then the noise measurement should be conducted at the highest individual rotor rpm values allowed at the reference conditions. If the aircraft is configured such that the highest rotor speeds cannot be achieved during the test, then, in coordination with the Agency, testing at a lower rotor speed may be performed. The specification for individual rotor speeds to remain within $\pm 3\%$ of their averaged value during the 10 dB-down period is intended to provide repeatability to the noise measurements. An alternative envelope for individual rpm variations can be proposed by the applicant in coordination with the Agency.



one after the other. Conducting the test runs in pairs, however, would alleviate the should take the wind direction into account. The applicant will therefore typically find it expedient to conduct tests in such a manner and include additional pairs of test runs in case any of the test runs are proved invalid on subsequent analysis.

(3) Rotor speed

The Interpretative Material on rotor speed mentioned in IM2 of NVTOL.1405 - Flight test procedures is still applicable to the overflight procedure. The specification for individual rotor speeds to remain within $\pm 3\%$ of their averaged value during the 10 dB-down period is intended to provide repeatability to the noise measurements. An alternative envelope for individual rpm variations can be proposed by the applicant and will need to be agreed with the Agency.

IM4 NVTOL.1405 - Flight test procedures

APPROACH FLIGHT TEST PROCEDURE

(a) Approach profile

Figure 8 depicts the reference approach profile and a possible measured approach profile under zero-wind condition.

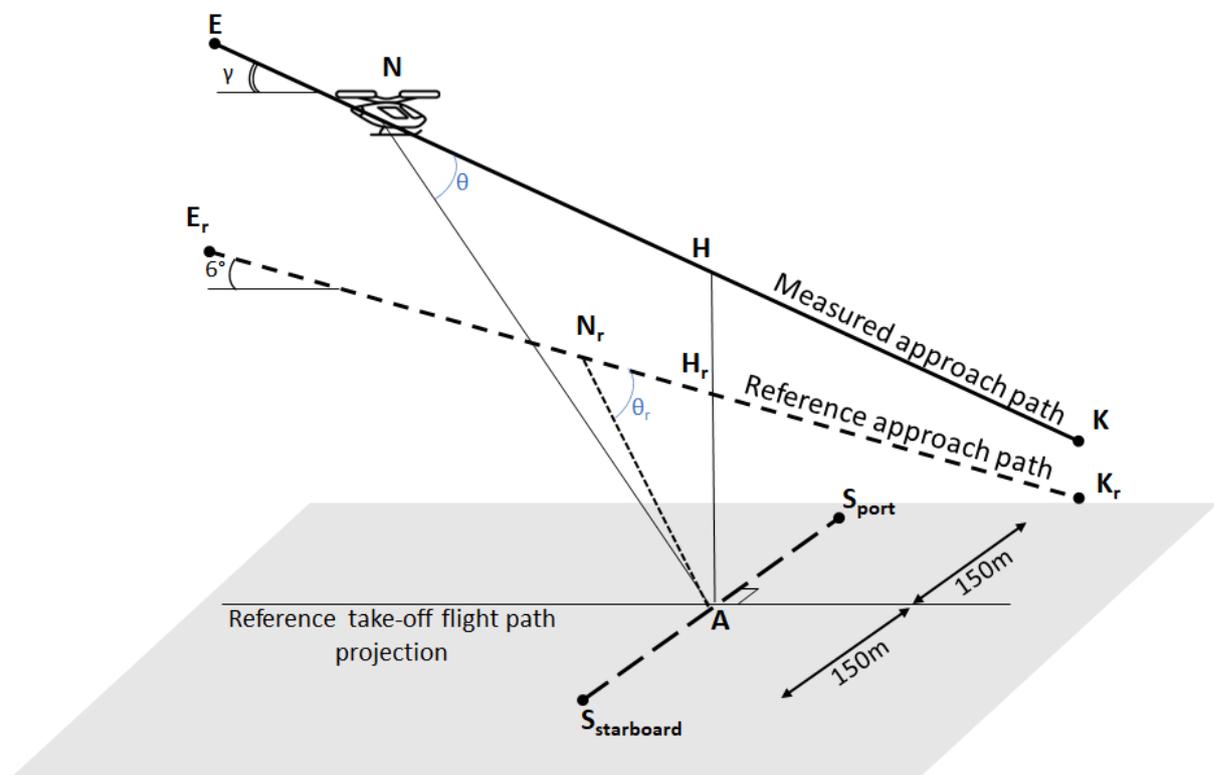


Figure 8: Comparison of measured and reference approach profiles

(b) Flight test procedure

(1) Number of test runs

At least six test runs are needed with simultaneous noise measurements at each of the noise measurement points. The applicant should, as in the case of take-off and overflight, consider additional test runs to ensure that enough valid data points are available.

(2) Rotor speed

The Interpretative Material on rotor speed mentioned in IM2 of NVTOL.1405 - Flight test procedures is still applicable to the approach procedure. The specification for individual rotor speeds to remain within $\pm 3\%$ of their averaged value during the 10 dB-down period is intended to provide repeatability to the noise measurements. An alternative envelope for individual rpm variations can be proposed by the applicant and will need to be agreed with the Agency.

NVTOL.1410 - Noise measurement

(a) Noise measurement setup:

- (1) The sound levels should be measured with a noise measurement system satisfying the specifications of Subpart F.
- (2) The acoustical signals should be recorded and stored for subsequent analysis using a recording and reproducing system or computer-based system.
- (3) Provision should be made for an overload indication to occur during an overload condition on any relevant level range. Aircraft noise data collected during an overload condition of any measurement system components in the signal path prior to and including the recorder are invalid and should not be used.
- (4) The background noise should be recorded (for at least 30 seconds) at the measurement points with the system gain set at the levels used for the aircraft noise measurements. The recorded background noise should be representative of that which exists during the test run. Background noise recordings should be performed at the beginning and end of every test series, and at least every hour within a given test series.
- (5) The entire noise measurement setup should be described, and all its individual components identified in the Test Plan.

(b) Calibration and checking of the system:

- (1) The acoustical sensitivity of the noise measurement system should be checked with the system gain set at levels which will be used for aircraft noise measurements, using a sound calibrator as specified in paragraph (a) of NVTOL.1520 - Calibration systems before the test starts, after the test has ended, and at least every hour during the test. Aircraft noise data acquired not preceded and succeeded by such checks are invalidated. One necessary condition for the noise measurement system to be considered satisfactory is for the difference of acoustical sensitivity levels of the noise measurement system to be less than or equal to 0.5 dB(A) between the checks. The arithmetic average of the preceding and succeeding calibrations should be used to represent the acoustical sensitivity level of the measurement system for each group of aircraft noise measurements. The

corresponding calibration corrections should be reported to the Agency as part of the reporting specifications of Subpart H and applied to the measured one-third octave band sound pressure levels determined from the output of the analyser as specified in paragraph (a)(1) of NVTOL.1600 - Adjustments of the measured sound levels.

- (2) When the angles of incidence at the microphone of sound emitted from the aircraft are outside of $\pm 30^\circ$ of grazing incidence (see Figure 9), corrections for incidence effects should be determined at the angle of incidence for each one-half second sample.
- (3) The insertion losses of windscreens should be determined for each one-third octave nominal mid-band frequency from 50 Hz to 10 kHz inclusive within six months of each aircraft noise measurement by a method traceable to a national standards laboratory with sinusoidal sound signals at appropriate incidence angles on the inserted microphone. With respect to windscreen insertion losses, the following specifications should be used:
 - (i) The change in insertion losses from the previous calibration at each one-third octave frequency band should not be more than ± 0.4 dB, otherwise the windscreen should be replaced by a new one.
 - (ii) In the absence of wind and for sinusoidal sounds at grazing incidence, the insertion loss caused by the windscreen of a stated type installed around the microphone should not exceed ± 1.5 dB at nominal one-third octave mid-band frequencies from 50 Hz to 10 kHz inclusive.
- (4) The frequency response of the entire measurement system, exclusive of the microphone and windscreen, but otherwise configured as deployed in the field during the aircraft noise measurements, should be established. Corrections should be determined for each one-third octave nominal mid-band frequency from 50 Hz to 10 kHz inclusive. The determination should be made at a level within 5 dB of the level corresponding to the calibration sound pressure level on the reference level range.

The frequency response of the entire measurement system should be determined either with pseudo-random noise or alternatively with discrete sine or swept sine signals at every third-octave mid-band from 50 Hz to 10 kHz. If a pink noise calibrator is used, it should be calibrated within 6 months of the measurement and its output in each one-third octave band should not change by more than 0.2 dB between calibrations. Should this condition not be met, the pink noise calibrator should not be used for the test and should be replaced. If the system frequency response corrections are determined away from the field, then frequency response testing should still be performed in the field to ensure the integrity of the measurement system.

- (c) The calibration corrections specified in (b), including those for the environmental effects on sound calibrator output level, should be applied to the measured one third octave sound pressure levels determined from the output of the analyser.

MoC1 NVTOL.1410 - Noise measurement

SOUND CALIBRATOR CHECKS

The initial, final and periodic checks permit to identify any potential change in the overall sensitivity of the noise measurement system. It is important that the system warm-up time recommended by the noise measurement instruments manufacturer be observed prior to the checks.

MoC2 NVTOL.1410 - Noise measurement

WINDSCREENS

When windscreens are undamaged and uncontaminated, the insertion effects specified in paragraph (b)(3) of NVTOL.1410 - Noise measurement may be obtained directly from the manufacturer's data. When the angles of incidence of sound emitted from an aircraft are within +30° of grazing incidence, a single set of values based upon windscreen insertion loss tests at grazing incidence may be used. For other cases, the windscreen insertion loss adjustments should be determined and applied on the basis of intervals between angles tested not exceeding 30°. When the windscreen data adjustments provided by the manufacturer are presented in the form of curves, the insertion loss throughout each one-third octave band, rather than just at the nominal mid-band frequency, should be included. Windscreen data adjustments may also be obtained by free-field calibration in an anechoic chamber if agreed with the Agency.

MoC3 NVTOL.1410 - Noise measurement

APPLICATION OF ADJUSTMENTS FOR INCIDENCE

To meet the specifications of paragraph (b)(2) of NVTOL.1410 - Noise measurement, provided that a continuous record of time-space-position information is available, free-field and windscreen insertion-loss incidence data adjustments can be applied to the noise data on a spectral record by spectral record basis. These adjustments are obtained by calculating the angle of incidence for each record, using the point of time that characterizes the 2-second averaging period of the SLOW time weighting (see MoC2 NVTOL.15-5 - Analysis system) and determining the aircraft emission coordinates and angle of incidence for the sound measured at that time.

IM1 NVTOL.1410 - Noise measurement

SOUND LEVEL VARIABILITY

The sound levels may vary mainly due to environmental factors and the internal warm-up as recommended for most noise measurement instruments. Occasionally, sound level variations may occur due to cable problems or even equipment damage. A proper check of the overall sensitivity of the noise measurement system permits to identify such occurrences.

NVTOL.1415 – Spatial positioning and speed measurement

- (a) The point of the aircraft that is tracked for positioning should be carefully identified to ensure a consistent adjustment to the reference flight track specified in NVTOL.1200 - Reference noise measurement points.
- (b) For the take-off, overflight and approach procedures, and for each run, the following parameters should be measured:
 - (1) the spatial coordinates of the aircraft in terms of latitude, longitude and height, or in a Cartesian coordinate system with its origin at the central measurement point defined in paragraphs (a), (b) and (c) of NVTOL.1200 - Reference noise measurement points, the X axis aligned in the direction of the reference flight path projection, the Y axis towards the port direction and the Z axis pointing up. The spatial coordinates should be measured with a sample rate equal to or greater than 2 Hz;
 - (2) the True Airspeed of the aircraft with a sample rate equal to or greater than 2 Hz;
 - (3) the values of each individual rotor rpm with a sample rate equal to or greater than 2 Hz.
- (c) For the hover procedure, and for each run, the following parameters should be measured:
 - (1) the spatial coordinates of the aircraft in terms of latitude, longitude and height, or in a Cartesian coordinate system with its origin at the central measurement point specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points, the X axis aligned in the direction of the first set of noise measurement points specified in paragraph (d)(2) of NVTOL.1200 - Reference noise measurement points, the Z axis pointing up and the Y axis resulting from the X and Z axes. The spatial coordinates should be measured with a sample rate equal to or greater than 2 Hz;
 - (2) the values of each individual rotor rpm with a sample rate equal to or greater than 2 Hz.
- (d) The spatial positioning and speed measurement should be carried out using a global navigation satellite system (augmented GNSS) receiver that should be augmented and installed on board of the aircraft independently from the aircraft built-in navigation system;
- (e) The spatial positioning and speed measurement instruments should be operated within their environmental limitations as specified by their manufacturer.

MoC1 NVTOL.1415 – Spatial positioning and speed measurement

SPATIAL POSITIONING AND SPEED MEASUREMENT METHODS

GNSS receivers to obtain time-space-position information are widely available for general use. They utilize signals from established satellite networks such as the EU Galileo system, the Russian global navigation satellite system (GLONASS), and the US NAVSTAR global positioning system (GPS). However, conventional GNSS receivers are not considered to be sufficiently accurate to obtain time-space-position information for the aircraft noise test. For this reason, the GNSS is to be augmented as specified in paragraph (d) of NVTOL.1415 – Spatial positioning and speed measurement to improve its accuracy. The following are acceptable augmentation methods:

- (a) Differential global navigation satellite system (DGNSS)
A significant improvement in accuracy can be achieved by supplementing the data obtained from the GNSS receiver with data from a second local fixed-position GNSS receiver at a known location. Such an

arrangement is referred to as the differential GNSS (DGNSS). In some instances, the local fixed-position GNSS receiver can be installed by the applicant in the vicinity of the noise measurement point. In such a case, its exact position should be properly surveyed by a third point located at known latitude, longitude, and elevation such as a monument. In other instances, the applicant may rely on a ground-based augmentation system (GBAS), which provides access to a set of reference local fixed-position GNSS receivers, and which is very often located in the vicinity of airports. DGNSS systems suitable for noise certification purposes should achieve an accuracy of or better than 1 m.

(b) Satellite-based augmentation systems (SBAS)

SBAS such as the European Geostationary Navigation Overlay Service (EGNOS) provide an augmentation using satellite-broadcast.

(c) Real-time kinematic positioning (RTK)

The RTK method is also based on the principle of differential correction. It uses measurements of the phase of the carrier wave of the GNSS receiver signal in addition to the information contained in this signal. It relies on reference stations and can provide corrections up to centimetre-level accuracy.

More details on recommended practices can be found in Section 3.2.1 of ICAO Doc 9501 Volume I (International Civil Aviation Organization Doc 9501, Environmental Technical Manual, Volume I – Procedures for the Noise Certification of Aircraft, Third Edition, 2018).

(d) Post-processing for methods relying on augmentation systems

If the information from the augmentation system is not available in real-time, the aircraft built-in navigation system can be the primary tool used to fly the aircraft according to the specified procedures.

(e) To validate the installation, the aircraft can be parked at a known, surveyed location and read its position read from the DGNSS system. The installation can be verified from a comparison of the DGNSS and surveyed positions. This can be performed either at the test site or at another location, such as the aircraft home base, if it is within 37 km (23 miles) of the test site. As a minimum, this process should be performed at the start and end of each measurement programme and preferably at the beginning of each measurement day. It is recommended that the DGNSS location validation test data from the aircraft be processed through the local coordinate conversion software to compare the computed XYZ aircraft coordinates with those of the surveyed microphone locations. It is recommended that this procedure be performed every time the DGNSS system is activated after having been powered down.

IM1 NVTOL.1415 – Spatial positioning and speed measurement AUGMENTED GLOBAL NAVIGATION SATELLITE SYSTEM (GNSS)

As indicated in MoC1 NVTOL.1415 – Spatial positioning and speed measurement, when using augmented GNSS to obtain spatial positioning and speed measurement of the aircraft, the aircraft built-in navigation system can be the primary tool used to fly the aircraft according to the specified procedure, while the data acquired from the DGNSS might only be available after completion of the test. This may lead to

situations where runs, which would be deemed valid according to the aircraft built-in navigation system, will have to be rejected, and may require to deploy the complete test equipment again in case there would not be enough valid runs. The applicant may find merit in conducting pre-test flights to evaluate possible systematic offsets between results obtained with the aircraft built-in navigation system and results obtained with the augmented GNSS.

SUBPART F – NOISE TEST EQUIPMENT

NVTOL.1500 – Noise measurement system

- (a) The noise measurement system should satisfy the specifications in this Subpart. It consists of the following equipment:
- (1) windscreens;
 - (2) microphone systems, each consisting of a microphone and preamplifier;
 - (3) one or several recording and reproducing systems to store the measured aircraft noise signals for subsequent analysis;
 - (4) one or several one-third octave band analysis systems; and
 - (5) calibration systems to maintain the acoustical sensitivity of the above systems within specified tolerance limits.
- (b) For any component of the measurement system that converts an analogue signal to digital form, such conversion should be performed so that the levels of any possible aliases or artefacts of the digitization process will be less than the upper boundary of the linear operating range by at least 50 dB at any frequency less than 12.5 kHz. The sampling rate should be at least 28 kHz. An anti-aliasing filter should be included before the digitization process.
- (c) The noise measurement instruments should be operated within their environmental limitations as specified by their manufacturer.

NVTOL.1505 – Microphone system characteristics and set-up

- (a) Each microphone should be a 12.7 mm diameter pressure type, protected with a grid, mounted with the sensing element 1.2 m above the local ground surface and oriented for grazing incidence, i.e. with the sensing element substantially in the plane defined by the predicted reference flight path of the aircraft and the measuring station.
- (b) The free-field sensitivity level of each microphone system in the reference direction, at frequencies over at least the range of one-third octave nominal mid-band frequencies from 50 Hz to 5 kHz inclusive, should be within ± 1.0 dB of that at the calibration check frequency, and within ± 2.0 dB for nominal mid-band

frequencies of 6.3 kHz, 8 kHz and 10 kHz. A microphone system not meeting this specification should not be used for the test.

- (c) For input sinusoidal sound waves at each one-third octave nominal mid-band frequency over the range from 50 Hz to 10 kHz inclusive, the free-field sensitivity levels of the microphone system at sound incidence angles of 30°, 60°, 90°, 120° and 150° should not differ from the free-field sensitivity level at a sound incidence angle of 0° (“normal incidence”) by more than the values shown in Table 6.
- (d) The free-field sensitivity level differences at sound incidence angles between any two adjacent sound incidence angles in Table 6 should not exceed the maximum difference of Table 6 at the greater of those two incidence angles.

| Nominal Mid-band frequency [kHz] | Maximum difference between the free-field sensitivity level of a microphone system at normal incidence (0°) and the free-field sensitivity level at a specified sound incidence angles [dB] | | | | |
|----------------------------------|---|-----|-----|-----|-----|
| | Sound incidence angle [°] | | | | |
| | 30 | 60 | 90 | 120 | 150 |
| 0.05 to 1.6 | 0.5 | 0.5 | 1.0 | 1.0 | 1.0 |
| 2.0 | 0.5 | 0.5 | 1.0 | 1.0 | 1.0 |
| 2.5 | 0.5 | 0.5 | 1.0 | 1.5 | 1.5 |
| 3.15 | 0.5 | 1.0 | 1.5 | 2.0 | 2.0 |
| 4.0 | 0.5 | 1.0 | 2.0 | 2.5 | 2.5 |
| 5.0 | 0.5 | 1.5 | 2.5 | 3.0 | 3.0 |
| 6.3 | 1.0 | 2.0 | 3.0 | 4.0 | 4.0 |
| 8.0 | 1.5 | 2.5 | 4.0 | 5.5 | 5.5 |
| 10.0 | 2.0 | 3.5 | 5.5 | 6.5 | 7.5 |

Table 6: microphone system directional response specifications

- (e) The free-field frequency response of each microphone system should be determined within 90 days of each aircraft noise measurement.
- (f) The free-field frequency response of each microphone system should be applied to the measured one-third octave band sound pressure levels determined from the output of the analyser.

MoC1 NVTOL.1505 – Microphone system characteristics and set-up

MICROPHONE CHARACTERISTICS

The specifications of Table 6 are based on the performance characteristics of typical one-half inch condenser microphones designed for nearly uniform frequency response at grazing incidence. Other microphones may be used, provided they meet the specified performance specifications of NVTOL.1505 – Microphone system characteristics and set-up.

MoC2 NVTOL.1505 – Microphone system characteristics and set-up

MICROPHONE FREE-FIELD FREQUENCY RESPONSE

The free-field frequency response of each microphone system specified in paragraphs (b), (c), and (d) of NVTOL.1505 – Microphone system characteristics and set-up can be determined by using an electrostatic actuator in combination with the manufacturer’s data or by testing in an anechoic free-field facility.

IM1 NVTOL.1505 – Microphone system characteristics and set-up

SOUND INCIDENCE ANGLES ON THE MICROPHONE

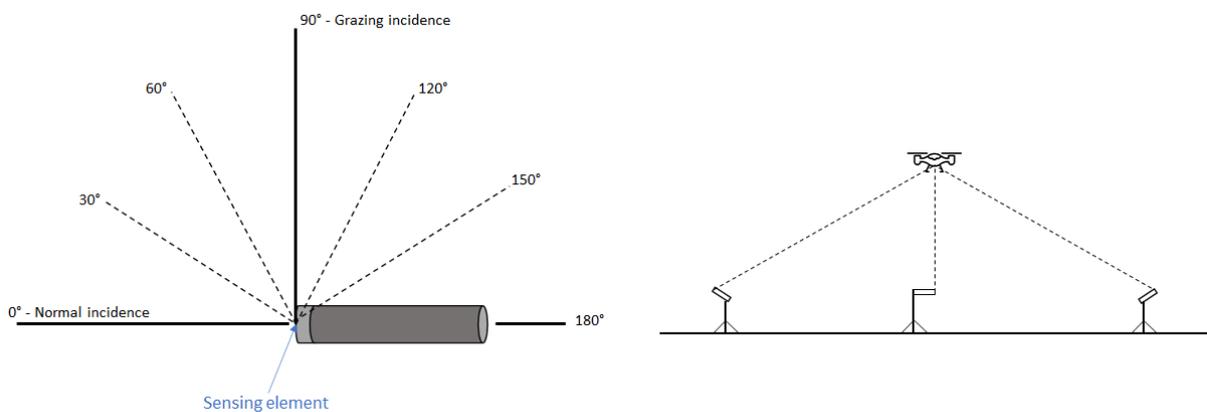


Figure 9: illustration of sound incidence angles on a microphone and positioning for noise measurements

Figure 9 depicts sound incidence angles on a microphone, and illustrates microphones positioned for grazing incidence under the flight path and to the side of the flight path of the aircraft.

NVTOL.1510 – Recording and reproducing system

- The complete acoustical signals should be stored using a digital recording and reproducing system with a permanent data storage device. The applicant should not use magnetic tape recorders, digital audiotape, or any other analogue recording equipment. Additionally, systems that use data compression techniques that result in substantial data loss, such as mini-disc (MD) or digital compact cassette (DCC), will not be accepted.
- For steady sinusoidal electrical signals applied to the input of the entire measurement system exclusive of the microphone systems, but including the microphone preamplifiers, and any other signal-conditioning elements that are considered to be part of the microphone systems, at a selected signal level within 5 dB of that corresponding to the calibration sound pressure level on the reference level range, the time average signal level indicated by the readout device at any one-third octave nominal mid-band frequency from 50 Hz to 10 kHz inclusive should be within ± 1.5 dB of that at the calibration check

frequency. The frequency response of a measurement system, which includes components that convert analogue signals to digital form, should be within ± 0.3 dB of the response at 10 kHz over the frequency range from 10 kHz to 11.2 kHz.

- (c) For all appropriate level ranges and for steady sinusoidal electrical signals applied to the input of the measurement system exclusive of the microphone systems, but including the microphone preamplifiers, and any other signal conditioning elements that are considered to be part of the microphone systems, at one-third octave nominal mid-band frequencies 50 Hz, 1 kHz and 10 kHz, the level non-linearity should not exceed ± 0.5 dB for a linear operating range of at least 50 dB below the upper boundary of the level range. If the calibration check frequency is not one of the 50 Hz, 1 kHz and 10 kHz frequency bands, the check should also be performed at that frequency.

The highest steady sinusoidal sound pressure level applied to the input of the measurement system, exclusive of the microphone systems, at which the non-linearity exceeds ± 0.4 dB, is used as “post-detection noise” in the background noise subtraction procedure of paragraph (b) of NVTOL.1600 Adjustments of the measured sound levels.

Additionally, the lowest input level value at which the non-linearity tests to satisfy the specifications of paragraph € of NVTOL.1510 Recording and reproducing system have been conducted should be considered as “post-detection noise” in the adjustment procedure for the effect of background noise of paragraph (b) of NVTOL.1600 Adjustments of the measured sound levels, even if no non-linearity was detected at such an input value.

- (d) On the reference level range, the level corresponding to the calibration sound pressure level should be at least 5 dB, but no more than 30 dB less than the upper boundary of the level range.
- (e) The linear operating ranges on adjacent level ranges should overlap by at least 50 dB minus the change in attenuation introduced by a change in the level range controls.
- (f) If attenuators are included in the measurement system to permit range changes, they should operate in known intervals of decibel steps.

MoC1 NVTOL.1510 – Recording and reproducing system

FREQUENCY RESPONSE

It is not necessary to include microphone extension cables as configured in the field when showing conformity with the specifications of paragraph (b) of NVTOL.1510 – Recording and reproducing system.

MoC2 NVTOL.1510 – Recording and reproducing system

LEVEL LINEARITY

It is not necessary to include microphone extension cables as configured in the field when showing conformity with the specifications of paragraph (c) of NVTOL.1510 – Recording and reproducing system.

MoC3 NVTOL.1510 – Recording and reproducing system

LINEAR OPERATING RANGES ON ADJACENT LEVEL RANGES

With respect to the specification of paragraph (e) of NVTOL.1510 – Recording and reproducing system, a measurement system should not have level range controls that permit attenuation changes of, for example, either 10 dB or 1 dB. With 10 dB steps, the minimum overlap requested would be 40 dB, and with 1 dB steps the minimum overlap would be 49 dB.

IM1 NVTOL.1510 – Recording and reproducing system

LEVEL LINEARITY

The lower limit of a digital recording system's usable dynamic range is determined by amplitude non-linearity due to quantization error rather than by the presence of a noise floor, the latter being close to 0 dB in digital noise acquisition systems available on the market today. For this reason, the recording system used for the aircraft noise test should be tested to determine the extent of such non-linearity, and the highest noise level at which a non-linearity appears will have to be marked as "post-detection noise" in the adjustment procedure for the effect of background noise according to paragraph (b) of NVTOL.1600 - Adjustments of the measured sound levels, for each third-octave band.

IM2 NVTOL.1510 – Recording and reproducing system

ATTENUATOR SPECIFICATIONS

Attenuators should have fixed repeatable steps. Any devices in the measurement system that use continuously adjustable gain controls should also have some demonstrable means of being fixed, or locked at a specific setting, to eliminate non-traceable gain errors.

NVTOL.15–5 - Analysis system

- (a) The output of the analysis system consists of one-third octave band sound pressure levels as a function of time, obtained by processing the noise signals through an analysis system with the following characteristics:
- (1) a set of 24 one-third octave band filters, or their equivalent, having nominal mid-band frequencies from 50 Hz to 10 kHz inclusive;
 - (2) response and averaging properties in which, in principle, the output from any one-third octave filter band is squared, averaged and displayed or stored as time-averaged sound pressure levels;
 - (3) the interval between successive sound pressure level samples is 500 ms \pm 5 ms for spectral analysis with or without SLOW-time-weighting;

- (4) for those analysis systems that do not process the sound pressure signals during the period of time required for readout and/or resetting of the analyser, the loss of data should not exceed a duration of 5 ms; and
- (5) the analysis system operates in real time from 50 Hz to at least 12 kHz inclusive. This applies to all operating channels of a multichannel spectral analysis system.
- (b) The one-third octave band analysis system should conform with the class 1 electrical performance specifications of IEC 61260³, over the range of one-third octave nominal mid-band frequencies from 50 Hz to 10 kHz inclusive.
- (c) SLOW-time averaging:
- (1) When SLOW-time-averaging is performed in the analyser, the response of the one-third octave band analysis system to a sudden onset or interruption of a constant sinusoidal signal at the respective one-third octave nominal mid-band frequency should be measured at sampling instants 0.5, 1, 1.5 and 2 seconds after the onset and 0.5 and 1 second after interruption. The rising response should be -4 ± 1 dB at 0.5 seconds, -1.75 ± 0.75 dB at 1 second, -1 ± 0.5 dB at 1.5 seconds and -0.5 ± 0.5 dB at 2 seconds relative to the steady-state level. The falling response should be such that the sum of the output signal levels, relative to the initial steady-state level, and the corresponding rising response reading is -6.5 ± 1 dB, at both 0.5 and 1 seconds. At subsequent times the sum of the rising and falling responses should be -7.5 dB or less.
- (2) When the one-third octave band sound pressure levels are determined from the output of the analyser without SLOW-time-weighting, SLOW-time-weighting should be simulated in the subsequent processing by the following equation:
- $$L_s(l,k) = 10 \log_{10} [(0.60653) 10^{0.1L_s[l,(k-1)]} + (0.39347) 10^{0.1L(l,k)}]$$
- where $L_s(l,k)$ is the simulated SLOW-weighted sound pressure level and $L(l,k)$ is the as-measured 0.5 seconds time average sound pressure level determined from the output of the analyser for the k^{th} instant of time and the l^{th} one-third octave band. For $k = 1$, the SLOW-weighted sound pressure $L_s[l,(k-1 = 0)]$ on the right-hand side is set to 0 dB.
- (3) The instant in time by which a SLOW-time-weighted sound pressure level is characterized is 0.75 seconds earlier than the actual readout time.
- (d) The resolution of the sound pressure levels, both displayed and stored, should be 0.1 dB or better.

MoC1 NVTOL.15-5 - Analysis system

CLASS 1 ELECTRICAL PERFORMANCE SPECIFICATIONS

To meet the specifications of paragraph (b) of NVTOL.15-5 - Analysis system, the tests of the one-third octave band analysis system should be made according to the methods described in IEC 61260³ or by an

³ IEC 61260 Part 1, entitled "Electroacoustics — Octave-band and fractional-octave-band filters", Edition 1.0, 2014-02.

equivalent procedure agreed with the Agency, for relative attenuation, anti-aliasing filters, real-time operation, level linearity, and filter integrated response (effective bandwidth).

MoC2 NVTOL.15–5 - Analysis system

SLOW-TIME AVERAGING

The equation specified in paragraph (c)(2) of NVTOL.15–5 - Analysis system can be approximated by the following equation for a four-sample averaging process for $k = 4$:

$$L_s(l,k) = 10 \log_{10} [(0.13) 10^{0.1L(l,(k-3))} + (0.21) 10^{0.1L(l,(k-2))} + (0.27) 10^{0.1L(l,(k-1))} + (0.39) 10^{0.1L(l,k)}]$$

where $L_s(l,k)$ is the simulated SLOW-weighted sound pressure level and $L(l,k)$ is the as-measured 0.5 seconds time average sound pressure level determined from the output of the analyser for the k^{th} instant of time and the l^{th} one-third octave band. Sound pressure levels calculated by means of either equation are valid for the sixth and subsequent 0.5 seconds data samples, or for times greater than 2.5 seconds after initiation of data analysis.

IM1 NVTOL.15–5 - Analysis system

CLASS 1 ANALYSER SPECIFICATIONS

To meet the criteria of paragraph (b) of NVTOL.15–5 - Analysis system, IEC 61260³ specifies the electrical performance specifications of one-third octave band filters, including tolerances for the attenuation in the transition bands (i.e. “skirts”) adjacent to the one-third octave passbands. Most digital one-third octave band analysis systems offer only hardwired filtering algorithms that emulate the response of a traditional third-order analysis filter having a maximally flat passband. However, some analysis systems allow the selection of other filtering algorithms that might not provide equivalent performance. The applicant should demonstrate the effects that alternate filter design response characteristics might have on noise certification EPNL values.

The manufacturer can establish the geometric centre frequencies of one-third octave band filters using either Base 2 or Base 10 systems. While the use of either method results in frequencies close to the nominal centre frequencies referred to in Table 2, it is important to note which system is used so that the bandwidth error adjustment can be properly determined. Use of test frequencies calculated by a different base-number system than that for which the analyser was designed can result in erroneous values for these adjustments.

IM2 NVTOL.15–5 - Analysis system

SLOW-TIME AVERAGING

The specifications of paragraph (c)(1) of NVTOL.15-5 - Analysis system equate to an exponential averaging process (SLOW weighting) with a nominal 1-second time constant (i.e. 2 seconds averaging time).

The coefficients in the equations of paragraph (c)(2) of NVTOL.15-5 - Analysis system and associated MoC2 were calculated for use in determining equivalent SLOW-weighted sound pressure levels from samples of 0.5 seconds time average sound pressure levels. The equations should not be used with data samples where the averaging time differs from 0.5 seconds.

The specification in paragraph (c)(3) of NVTOL.15-5 - Analysis system of the instant in time at which a SLOW-time-weighted sound pressure level is characterized is needed to correlate the recorded noise with the aircraft position when the noise was emitted, and takes into account the averaging period of the SLOW weighting. For each one-half second data record this instant in time may also be identified as 1.25 seconds after the start of the associated 2-second averaging period.

The first element in determining individual SLOW timestamps for SPL spectra is to establish accurate time-synchronization between the acoustic measurement & analysis system and the aircraft TSPI (Time Space Position Information) system, since the primary purpose of establishing a moment in time for acoustic data is to determine the aircraft position relative to the microphone at the time the sound was emitted. Once adequate time-synchronization has been established between acoustic and position measuring systems, the next element is identification of the moment at which acoustic analysis is initiated. Depending on the synchronization technique used and the specifics of the analysis system, this can be as simple as logging the moment in time at which the operator presses “run” on the analyser, which in many analysis systems is logged automatically and to a great degree of accuracy. In other cases, there may should be some engineering judgment, combined with laboratory-testing to determine the “startup” characteristics of a particular analysis system. In all cases, a clearly defined moment at which the analysis is started is required. This “start time” is needed in order to accurately compute the slow timestamp for any aircraft noise SPL spectrum. Knowing the start time of the analysis allows for determination of the output (readout) time of each SLOW SPL spectrum from the analysis system. Since paragraph (a)(3) of NVTOL.15-5 - Analysis system specifies 500ms intervals between outputs of SPL data from the analyser, the individual readout time (in seconds) of the kth spectrum will be equal to the start time plus 0.5 times the sequential record number of the spectrum, k:

$$\text{Readout time (k)} = \text{start time} + (0.5 * k)$$

For the kth SLOW time-weighted spectrum, the timestamp is the readout time minus 0.75 seconds:

$$\text{SLOW Timestamp(k)} = \text{start time} + (0.5 * k) - 0.75 \text{ secs}$$

The relationship between analysis start time and individual slow timestamps can be seen in Figure 10.

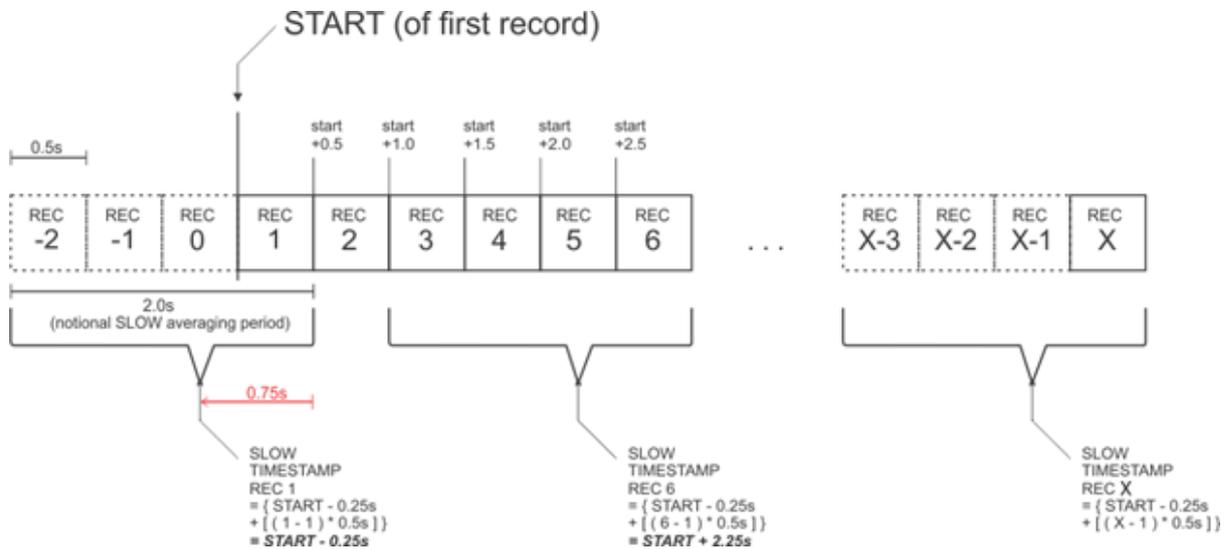


Figure 10: Determination of SLOW timestamp from analysis start time

NVTOL.1520 - Calibration systems

(a) Sound calibrator:

- (1) The sound calibrator used for checking the overall sensitivity of the noise measurement system as specified in paragraph (b) of NVTOL.1410 - Noise measurement should:
 - (i) conform with the Class 1 specifications of IEC 60942⁴;
 - (ii) generate a known sound pressure level using sine wave signals at a known frequency, using the manufacturer's supplied information on the influence of atmospheric air pressure and temperature.
- (2) The sound calibrator output should be determined by a method traceable to a national standards laboratory within 6 months of each noise test.
- (3) Changes in the output of the sound calibrator should not be more than 0.2 dB to its nominal output value.

(b) Pink noise generator:

- (1) If pink noise is used to determine the corrections for system frequency response specified in paragraph (b)(4) of NVTOL.1410 - Noise measurement, then the output of the pink noise generator should be determined within six months of each aircraft noise measurement by a method traceable to a national standards laboratory.

⁴ IEC 60942 Edition 4.0 2017-11 entitled "Electroacoustics — Sound calibrators".

- (2) Changes in the output of the pink noise calibrator should not be more than 0.2 dB from the previous calibration value.

SUBPART G – CONFORMITY PROCEDURE

NVTOL.1600 - Adjustments of the measured sound levels

(a) General

- (1) The calibration corrections obtained from the procedure specified in paragraph (b)(1) of NVTOL.1410 - Noise measurement are applied to the measured one-third octave band sound pressure levels determined from the output of the analyser.
- (2) When applicable, the corrections for incidence specified in paragraph (b)(2) of NVTOL.1410 - Noise measurement are applied to the measured one third octave band sound pressure levels determined from the output of the analyser.
- (3) The corrections for the free-field insertion effects of the windscreen specified in paragraph (b)(3) of NVTOL.1410 - Noise measurement are applied to the measured one-third octave sound pressure levels determined from the output of the analyser.
- (4) The corrections for frequency response specified in paragraph (b)(4) of NVTOL.1410 - Noise measurement are applied to the measured one-third octave sound pressure levels determined from the output of the analyser.
- (5) The background noise sound levels can be subtracted from the aircraft measured noise levels with a procedure agreed with the Agency.
- (6) The value of the speed of sound, c , expressed in m/s, is calculated according to the following formula: $c = 343.2 (T / T_0)^{1/2}$, where T is the ambient air temperature in Kelvin and $T_0 = 293.15$ K.

(b) Adjustment to reference procedures and conditions for the take-off, overflight and approach reference procedures

- (1) For the take-off, overflight and approach reference procedures specified in NVTOL.1205 – Reference procedures, the sound levels are adjusted according of the specifications (1) through to (9) to obtain the values of $EPNL_{TOref,i,j}$, $EPNL_{OVerf,i,j}$ and $EPNL_{APref,i,j}$ associated to the i^{th} test run of respectively take-off, overflight and approach procedures, and to the j^{th} reference noise measurement point (one central, two lateral).
- (2) For each i^{th} measured run of the take-off, overflight and approach test procedures specified in NVTOL.1405 - Flight test procedures, the emission coordinates (time, X, Y, and Z) of the reference data point associated with each $SPL_{ref,i,j}(l,k)$ at the k^{th} measured instant in time and the l^{th} 1/3-octave band are determined such that the sound emission angle θ on the reference flight path, relative to the reference microphone, is the same value as the sound emission angle of the as-measured data point associated with the spectrum associated with each test-day data point of the

i^{th} test run, of the j^{th} reference noise measurement point, at the k^{th} measured instant in time and the l^{th} 1/3-octave band, $SPL_{i,j}(l,k)$. The steps to be followed for this adjustment are specified in points (3). The values of $SPL_{\text{ref},i,j}(l,k)$ are then used to compute the resulting $EPNL_{\text{Tref},i,j}$, $EPNL_{\text{LOref},i,j}$ and $EPNL_{\text{APref},i,j}$ specified in (1), following the specifications of points (4) through to (8) below.

- (3) The spectrum associated with each test-day data point of the i^{th} test run, of the j^{th} reference noise measurement point, at the k^{th} measured instant in time and the l^{th} 1/3-octave band, $SPL_{i,j}(l,k)$, is adjusted for the differences between measured and reference sound propagation path lengths and between measured and reference atmospheric conditions by the following equation:

$SPL_{\text{ref},i,j}(l,k) = SPL_{i,j}(l,k) + 0.01 [\alpha_{i,j}(l) \cdot QK_{i,j}(k) - \alpha_{\text{ref}}(l) \cdot Q_{\text{ref}}K_{\text{ref},i,j}(k)] + 20 \log_{10}(QK_{i,j}(k) / Q_{\text{ref}}K_{\text{ref},i,j}(k))$, where

- $SPL_{\text{ref},i,j}(l,k)$ is the adjusted spectrum of the i^{th} test run, of the j^{th} reference noise measurement point, at the k^{th} measured instant in time and the l^{th} 1/3-octave band;
 - $\alpha_{i,j}(l)$ is the coefficient of atmospheric absorption (expressed in dB/100m) corresponding to the test conditions of the i^{th} test run, of the j^{th} reference noise measurement point, in the l^{th} 1/3-octave band, determined according to the process specified in MoC2 NVTOL.1400 - Test environment conditions;
 - $\alpha_{\text{ref}}(l)$ is the coefficient of atmospheric absorption (expressed in dB/100m) corresponding to the reference conditions specified in NVTOL.1210 - Reference atmospheric conditions in the l^{th} 1/3-octave band;
 - $QK_{i,j}(k)$ is the measured slant distance (in m) between the noise measurement point specified in NVTOL.1200 - Reference noise measurement points and the centre of gravity of the aircraft during the i^{th} test run, of the j^{th} reference noise measurement point, at the k^{th} measured instant in time;
 - $Q_{\text{ref}}K_{\text{ref},i,j}(k)$ is the slant distance (in m) between the noise measurement point specified in NVTOL.1200 - Reference noise measurement points and the centre of gravity of the aircraft flying on the reference procedure specified in NVTOL.1205 – Reference procedures at the same sound emission angle θ during the i^{th} test run, of the j^{th} reference noise measurement point, at the k^{th} measured instant in time.
- (4) The values of the reference adjusted Perceived Noise Level $PNL_{\text{ref},i,j}(k)$ at the k^{th} measured instant in time of the i^{th} run, of the j^{th} reference noise measurement point, are computed from the values of $SPL_{\text{ref},i,j}(l,k)$ according to the equations specified in paragraph (a)(3)(i) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.
- (5) For each value of $PNL_{\text{ref},i,j}(k)$, the reference tone-corrected perceived noise level of the i^{th} run, of the j^{th} reference noise measurement point, at the k^{th} instant in time, $PNLT_{\text{ref},i,j}(k)$, is computed by adding to $PNL_{\text{ref},i,j}(k)$ a tone correction factor C obtained according to the specifications of paragraph (c) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.
- (6) The maximum value of the reference tone-corrected perceived noise level of the i^{th} run, of the j^{th} reference noise measurement point, $PNLTM_{\text{ref},i,j}$, as well as the associated reference bandsharing adjustment, $\Delta_{\text{Bref},i,j}$, and first and last 10 dB down-points, $k_{\text{Fref},i,j}$ and $k_{\text{Lref},i,j}$, are determined according

to the specifications of paragraph (d) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.

- (7) The reference noise duration associated to the i^{th} run, of the j^{th} reference noise measurement point, is calculated as the sum of the reference time intervals for each k^{th} measured instant in time, $\delta t_{\text{ref},i,j}(k)$, within the 10 dB-down period, inclusive, where the values of $\delta t_{\text{ref},i,j}(k)$ are calculated as per the following formula:

$$\delta t_{\text{ref},i,j}(k) = [(t_{\text{ref},i,j}(k) - t_{\text{ref},i,j}(k-1)) + (t_{\text{ref},i,j}(k+1) - t_{\text{ref},i,j}(k))] / 2$$

where $t_{\text{ref},i,j}(k)$ is the reference reception time associated to $\text{PNLT}_{\text{ref},i,j}(k)$, $t_{\text{ref},i,j}(k-1)$ to the point preceding $\text{PNLT}_{\text{ref},i,j}(k)$, and $t_{\text{ref},i,j}(k+1)$ to the point following $\text{PNLT}_{\text{ref},i,j}(k)$.

- (8) The EPNL associated to the i^{th} run and the j^{th} reference noise measurement point, adjusted and to reference conditions, $\text{EPNL}_{\text{ref},i,j}$, is calculated as follows:

$$\text{EPNL}_{\text{ref},i,j} = 10 \log_{10} \frac{1}{t_0} \sum_{k_{\text{Pre},i,j}}^{k_{\text{Lr},i,j}} 10^{0.1 \text{PNLT}_{\text{ref},i,j}(k)} \delta_{\text{Iref},i,j}(k)$$

where the reference time, t_0 , is 10 seconds, and the other terms of the equation are defined in (5), (6) and (7). The value of $\text{EPIL}_{\text{ref},i,j}$ is set equal to $\text{EPNL}_{\text{TOfref},i,j}$, $\text{EPIL}_{\text{OVref},i,j}$ or $\text{EINL}_{\text{APref},i,j}$ according to the reference procedure under consideration (take-off, overflight or approach respectively).

- (9) A source noise adjustment should be added to the values of $\text{PNLT}_{\text{ref},i,j}(k)$ for the i^{th} test run, the j^{th} reference noise measurement point and the k^{th} measured instant in time. The selection of the noise correlating parameter(s) for this source noise adjustment should be agreed with the Agency.
- (10) Once the specifications (1) through to (9) have been followed for each j^{th} of the three reference noise measurement points (one central, two lateral) to obtain the values of $\text{EPNL}_{\text{TOfref},i,j}$, $\text{EPNL}_{\text{OVref},i,j}$ and $\text{EPNL}_{\text{APref},i,j}$, the three values corresponding to the three reference noise measurement points are averaged as a single number for each reference procedure (take-off, overflight and approach) to obtain $\text{EPNL}_{\text{TOfref},i}$, $\text{EPNL}_{\text{OVref},i}$ and $\text{EPNL}_{\text{APref},i}$.

(c) Adjustment to reference procedures and conditions for the hover procedure

- (1) The measured sound levels are adjusted to account for the difference between the hover test procedures and conditions and the reference procedures and conditions as defined in Subpart C, and in particular, to account for the following effects:
- (i) the difference in the sound propagation path lengths between the actual hover flight path of the test aircraft and the reference hover flight path; and
 - (ii) the difference in the atmospheric absorptions between meteorological test conditions and reference conditions.
- (2) For each run the measured sound level is adjusted to account for the effects listed in point (1) and to obtain the reference sound level by adding components as follows:

$$L_{\text{Aeqref},i,j} = L_{\text{Aeq},i,j} + \Delta_{1,i,j} + \Delta_{2,i,j}$$

where

- $L_{Aeqref,i,j}$ is the reference hover sound level of the i^{th} test run at the j^{th} of the 12 hover reference measurement points specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points.
- $\Delta_{1,i,j}$ is the adjustment component for the difference in sound propagation path lengths for the i^{th} test run at the j^{th} of the 12 hover reference measurement points specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points,
- $\Delta_{2,i,j}$ is the adjustment component for the difference in the atmospheric absorptions for the i^{th} test run at the j^{th} of the 12 hover reference measurement points specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points.
- $\Delta_{1,i,j} + \Delta_{2,i,j}$ is the adjustment value for the i^{th} run at the j^{th} hover reference measurement point.

(3) The adjustment component for the difference in the sound propagation path lengths accounts for the spherical spreading and is calculated as follows:

$$\Delta_{1,i,j} = 20 \log_{10} (SR_{i,j} / SR_{ref,j})$$

where:

- $SR_{i,j}$ is the slant distance, in meters, between the origin of the measurement array as specified in paragraph (d)(1) of NVTOL.1200 - Reference noise measurement points and the centre of gravity of the aircraft during the i^{th} run and the j^{th} noise measurement point.
- $SR_{ref,j}$ is the reference distance, in meters, calculated as follows:
 - If the j^{th} reference measurement point specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points is located $1.73 \times H$ away from the centre of the array defined in paragraph (d)(1) of NVTOL.1200 - Reference noise measurement points, then $SR_{ref,j} = H \times (1 + 1.73^2)^{0.5}$;
 - If the j^{th} reference measurement point specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points is located $2.75 \times H$ away from the centre of the array defined in paragraph (d)(1) of NVTOL.1200 - Reference noise measurement points, then $SR_{ref,j} = H \times (1 + 2.75^2)^{0.5}$;
 - If the j^{th} reference measurement point specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points is located $3.73 \times H$ away from the centre of the array defined in paragraph (d)(1) of NVTOL.1200 - Reference noise measurement points, then $SR_{ref,j} = H \times (1 + 3.73^2)^{0.5}$; and
 - the value of H is specified in paragraph (d)(2) of NVTOL.1200 - Reference noise measurement points.

- (4) The adjustment component for the difference in the atmospheric absorption accounts for the difference in the temperature and the relative humidity between the test and the reference atmospheric conditions, and is calculated as follows:

$$\Delta_{2,i,j}(l) = 0.01 [\alpha_i(l) \cdot SR_{i,j} - \alpha_R(l) \cdot SR_{ref,j}]$$

where:

- $\alpha_i(l)$ is the coefficient of atmospheric absorption (expressed in dB/100m) corresponding to the test conditions of the i^{th} hover test run in the l^{th} 1/3-octave band, determined according to the process specified in MoC2 NVTOL.1400 - Test environment conditions;
- $\alpha_R(l)$ is the coefficient of atmospheric absorption (expressed in dB/100m) corresponding to the reference conditions specified in NVTOL.1210 - Reference atmospheric conditions in the l^{th} 1/3-octave band;
- $SR_{i,j}$ and $SR_{ref,j}$ are specified in (3);

$\Delta_{2,i,j}(l)$ is added to each value of $SPL_{AS}(k,l)$ in the equation specified in NVTOL.1110 - Calculation of A-weighted continuous sound pressure level.

MoC1 NVTOL.1600 - Adjustments of the measured sound levels

ADJUSTMENTS OF NOISE LEVELS FOR THE EFFECTS OF BACKGROUND NOISE

Paragraph (a)(5) of NVTOL.1600 - Adjustments of the measured sound levels specifies that the background noise present during the test can be subtracted from the aircraft measured noise levels. This MoC provides an acceptable procedure for this background noise subtraction.

- (a) Definitions

For the purposes of this MoC, the following definitions apply:

Adjusted level: a valid one-third octave band level that has been adjusted for measurement conditions, including:

- the energy contribution of pre-detection noise; and
- frequency-dependent adjustments such as system frequency response, microphone pressure response and free-field response, and windscreen incidence-dependent insertion loss.

Ambient noise. The acoustical noise from sources other than the test aircraft present at the microphone site during aircraft noise measurements. Ambient noise is one component of background noise.

Background noise. The combined noise present in a measurement system from sources other than the test aircraft, which can influence or obscure the aircraft noise levels being measured. Typical elements of background noise include, but are not limited to, ambient noise from sources around the microphone site, thermal electrical noise generated by components in the measurement system, and digitization noise caused by quantization error in digital converters. Some elements of background

noise, such as digitization noise, can obscure the aircraft noise signal, while others, such as ambient noise, can also contribute energy to the measured aircraft noise signal.

Energy subtraction. Subtraction of one sound pressure level from another, on an energy basis, in the form of the following:

$$10 \log \left[10^{(\text{SPL}_1/10)} - 10^{(\text{SPL}_2/10)} \right],$$

where SPL_1 and SPL_2 are two sound pressure levels in decibels, with SPL_2 being the value subtracted from SPL_1 .

Frequency extrapolation. A method for reconstruction of high frequency masked data, based on unmasked data in a lower-frequency one-third octave band from the same spectrum.

High frequency bands. The twelve bands from 800 Hz through 10 kHz inclusive (also see “low frequency bands”).

Last good band (LGB). In the adjustment methodology presented in (b), for any aircraft one-third band spectrum, the LGB is the highest frequency unmasked band within the range of 630 Hz to 10 kHz inclusive, below which there are no masked high frequency bands.

Low frequency bands. The twelve bands from 50 Hz through 630 Hz inclusive (also see “high frequency bands”).

Masked band. Within a single spectrum, any one-third octave band containing a masked level.

Masked level. Any one-third octave band level that is less than or equal to the masking criterion for that band. When a level is identified as being masked, the actual level of aircraft noise in that band has been obscured by background noise and cannot be determined. Masked levels can be reconstructed using frequency extrapolation, time extrapolation or other methods.

Masking criteria. The spectrum of one-third octave band levels below which measured aircraft sound pressure levels are considered masked or obscured by background noise. Masking criteria levels are defined as the greater of pre-detection noise + 3 dB and post-detection noise + 1 dB.

Post-detection noise. The minimum levels below which measured noise levels are not considered valid. They are determined by the amplitude non-linearity characteristics of components in the measurement and analysis system: in a given one-third octave band, the lowest noise level at which linearity has been tested, or the noise level below which the system exhibits non-linearity according to the methods of IEC 61265⁵, whichever is the greater, is to be considered post-detection noise. Post-detection noise levels are non-additive (i.e. they do not contribute energy to measured aircraft noise levels).

⁵ IEC 61265 entitled “Electroacoustics – Instruments for measurement of aircraft noise – Performance specifications for systems to measure sound pressure levels in noise certification of aircraft”, Edition 2.0, 2018-05.

Pre-detection noise. Any noise that can contribute energy to the measured levels of sound produced by the aircraft, including ambient noise present at the microphone site and active instrumentation noise present in the measurement, record/playback and analysis systems.

Reconstructed level. A level, calculated by frequency extrapolation, time extrapolation, or by other means, which replaces the measured value for a masked band.

Sound attenuation coefficient. The reduction in level of sound within a one-third octave band, in dB per 100 m, due to the effects of atmospheric absorption of sound, calculated according to the specifications of MoC2 NVTOL.1400 - Test environment conditions.

Time extrapolation. A method for reconstruction of high frequency masked data, based on unmasked data in the same one-third octave band, from a different spectrum in the time history.

Valid or unmasked band. Within a single spectrum, any one-third octave band containing a valid level.

Valid or unmasked level. Any one-third octave band level that exceeds the masking criterion for that band.

(b) Background noise adjustment procedure

(1) Determination of pre-detection noise

A time-averaged one-third octave band spectrum of pre-detection noise levels for each test run, or group of runs occurring during a short time period, are obtained by recording and analysing ambient noise over a representative period of time (30 seconds or more). Care should be taken to ensure that this “ambient” noise sample reasonably represents that which is present during measured aircraft runs. In recording ambient noise, all gain stages and attenuators are set as they would be during the aircraft runs to ensure that the instrumentation noise is also representative. If multiple gain settings are required for aircraft noise measurements, a separate ambient sample is recorded at each of the settings used.

(2) Determination of post-detection noise

A one-third octave band spectrum of post-detection noise levels is determined as a result of testing, or from manufacturer’s specifications, for each measurement/analysis configuration used, including different gain and/or sensitivity settings. These minimum valid levels may be determined on the basis of display limitations (e.g. blanking of the displayed indication when levels fall below a certain value), amplitude non-linearity or other non-additive limitations. In cases where more than one component or stage of the measurement/analysis system imposes a set of minimum valid levels, the most restrictive in each one-third octave band should be used. As regards non-linearity, in a given one-third octave band, the lowest noise level at which linearity has been tested, or the noise level below which the system exhibits a non-linearity outside of ± 0.4 dB according to the methods of IEC 61265, whichever is the greater, is to be considered post-detection noise.

(3) Testing of pre-detection noise versus post-detection noise

The validity of pre-detection noise levels is established before these levels can be used to adjust valid aircraft noise levels. Any pre-detection noise level that is equal to or less than the post-

detection noise level in a particular one-third octave band is identified as invalid and therefore should not be used in the adjustment procedure.

(4) Determination of masking criteria

Once the pre-detection noise and post-detection noise spectra are established, the masking criteria can be identified. For each one-third octave band, the valid pre-detection noise level + 3 dB is compared with the post-detection noise level + 1 dB. The highest of these levels is used as the masking criterion for that band. If there is no valid pre-detection noise level for a particular one-third octave band, then the post-detection noise level + 1 dB is used as the masking criterion for that band.

(5) Identification of masked levels

Each spectrum in the aircraft noise time history is evaluated for masking by comparing the one-third octave band levels against the masking criteria levels. Whenever the aircraft level in a particular band is less than or equal to the associated masking criterion, that aircraft level is considered masked. A record is kept of which bands in each spectrum are masked.

(6) Determination of Last Good Band (LGB)

For each half-second spectral record, the highest unmasked one-third octave band frequency ("Last Good Band" or "LGB") is determined by starting at the 630 Hz band and incrementing the band number (i.e. increasing frequency) until a masked band is found. At that point, the LGB for that spectral record is equal to the band below the masked band. The lowest frequency band that can be identified as LGB is the 630 Hz band. In other words, if both the 630 Hz band and the 800 Hz band are masked, no reconstruction of masked levels may be performed for that spectrum, and the thirteen bands between 630 Hz and 10 kHz inclusive is left as is and identified as masked. According to the rejection criteria specified in (12), such a spectrum is not valid for calculation of EPNL when it occurs within the 10 dB-down period.

(7) Adjustment of valid levels for background noise

In each half-second spectrum, for each valid band up to and including LGB, an energy-subtraction of the valid pre-detection level from the valid measured level in the aircraft noise time history is performed using the following equation:

$$10 \log_{10} \left[10^{(\text{SPL}_{\text{aircraft}}/10)} - 10^{(\text{SPL}_{\text{PRE-DETECTION}}/10)} \right]$$

Energy subtraction can only be performed on all valid one-third octave band noise levels. For any one-third octave band where there is no valid pre-detection noise level, no energy subtraction may be performed (i.e. this adjustment should not be applied when either the measured aircraft noise time history level or the pre-detection noise level is masked).

(8) Adjustment of valid levels for measurement conditions

Before any reconstruction can be done for masked levels, the valid levels that have been adjusted for the presence of pre-detection noise are also then adjusted for frequency-dependent adjustments specified in paragraph (a) of NVTOL.1600 - Adjustments of the measured sound levels such as system frequency response, microphone pressure response and free-field response, and windscreen incidence-dependent insertion loss. These adjustments should not be applied to masked levels.

(9) Reconstruction of low frequency masked bands

In cases where a single masked low frequency one-third octave band occurs between two adjacent valid bands, the masked level can be retained, or the arithmetic average of the adjusted levels of the adjacent valid bands may be used in place of the masked level. If the average is used, the level is categorized as reconstructed. However, if masked low frequency bands are found adjacent to other masked low frequency bands, these masked levels are retained and remain categorized as masked. The procedure presented in this section does not provide for any other form of reconstruction for masked low frequency bands.

(10) Reconstruction of high frequency masked bands

Frequency extrapolation and time extrapolation are the methods used to reconstruct masked one-third octave band levels for bands at frequencies higher than LGB for each spectral record. One-third octave band sound attenuation coefficients (in dB per 100 m) are determined according to the specifications of MoC2 NVTOL.1400 - Test environment conditions before such reconstruction of masked band levels can be performed. Note that sound emission coordinates are also calculated for each record before reconstruction is performed since the procedure is dependent on propagation distance.

(i) Frequency extrapolation method

For a spectrum where the LGB is located at or above the 2 kHz one-third octave band, the frequency extrapolation method is used. This method reconstructs masked high frequency bands starting with the level associated with LGB in the same spectrum. The levels for all bands at higher frequencies than LGB are reconstructed using this method. Any frequency-extrapolated levels are categorized as reconstructed. The following equation for frequency extrapolation is used:

$$SPL_X(l, k) = SPL(l_{LGB}, k) + [\alpha(l_{LGB}) - \alpha(l)] \frac{SR(k)}{100} + [\alpha_R(l) - \alpha_R(l_{LGB})] \frac{60}{100}$$

where:

- l is the masked band to be extrapolated;
- k is the record of interest (instant in time);
- l_{LGB} is the LGB in record k;
- $SPL_X(l, k)$ is the frequency-extrapolated level in dB for masked band l and spectral record k;
- $SPL(l_{LGB}, k)$ is the level for LGB in record k after all test-day adjustments have been applied, including pre-detection noise energy subtraction, system and microphone adjustments, etc.;
- $\alpha(l_{LGB})$ is the test-day sound attenuation coefficient (dB per 100 m) for LGB;
- $\alpha(l)$ is the test-day sound attenuation coefficient (dB per 100 m) for band l;
- $\alpha_R(l_{LGB})$ is the reference (25°C, 70 per cent relative humidity (RH)) sound attenuation coefficient (dB per 100 m) for LGB;
- $\alpha_R(l)$ is the reference (25°C, 70 per cent RH) sound attenuation coefficient (dB per 100 m) for masked band l; and

- SR(k) is the slant range or sound propagation distance in metres at the time of sound emission for spectral record k, between the aircraft and the microphone.

(ii) Time extrapolation method

For a spectrum where LGB occurs at or between the 630 Hz one-third octave band and the 1.6 kHz band, the time extrapolation method is to be used. This method reconstructs a masked band in a spectrum from the closest spectral record (i.e. closest in time) for which that band is valid. The levels for all one-third octave bands with frequencies greater than that of LGB are reconstructed using this time extrapolation method. Any time-extrapolated levels are categorized as reconstructed. The time extrapolation to reconstruct masked bands is performed according to the following equation:

$$SPL_x(l, k) = SPL(l, m) + \alpha(l) \left[\frac{SR(m)}{100} - \frac{SR(k)}{100} \right] + 20 \log \left[\frac{SR(m)}{SR(k)} \right]$$

where:

- $SPL_x(l, k)$ is the time-extrapolated level in dB for masked band l and spectral record k;
- $SPL(l, m)$ is the adjusted level in dB for band l in spectral record m, which is the nearest record in time to record k in which band l contains a valid level;
- SR(m) is the slant range or sound propagation distance in metres at the time of sound emission for spectral record m, between the aircraft and the microphone;
- SR(k) is the slant range or sound propagation distance in metres at the time of sound emission for spectral record k, between the aircraft and the microphone; and
- $\alpha(l)$ is the test-day sound attenuation coefficient (dB per 100 m) for band l.

Note 1: when using the time-extrapolation method of reconstruction, extrapolating from a previously reconstructed SPL should be avoided. The closest valid SPL in a particular band may not be time-adjacent to the SPL being reconstructed.

Note 2: if there is no valid SPL in a particular band from which to extrapolate (i.e. all SPLs in that band during the test run are masked), then the nearest SPL in that band that has been reconstructed using the frequency-extrapolation method should be used. If this happens, this deviation from the provided time-extrapolation method is documented in the noise report if the time-extrapolated level occurs within the 10 dB down-period.

Note 3: when consecutive one-third octave bands in the range of 2.5 kHz to 10 kHz inclusive are masked, and when no consecutive bands are masked in the region of 800 Hz to 2 kHz inclusive, frequency extrapolation, as described in (i), is performed on all consecutive masked bands with nominal frequencies greater than 2 kHz.

Note 4: when consecutive one-third octave bands in the range of 800 Hz to 2 kHz inclusive are masked, time extrapolation, as described in (ii), is performed on all consecutive masked bands with nominal frequencies greater than 630 Hz.

Note 5: in cases where a single masked one-third octave band occurs between two adjacent valid bands, the levels of the adjacent adjusted bands may be arithmetically averaged and the averaged level used in place of the masked level. If the masked level is retained, it is included in the number of masked bands when considering the rejection criteria specified in (12).

(11) Handling of spectra after reconstruction of masked bands

After reconstruction of masked data has been performed, the background noise adjustment procedure is complete. The adjusted as-measured data set, comprised of adjusted levels, reconstructed levels, and possibly some masked levels, is then used to obtain the test-day PNL time history as specified in paragraph (c) of NVTOL.1105 - Calculation of Effective Perceived Noise Level. The identification of masked data is kept accessible for use during the tone correction procedure, since any tone correction that results from the adjustment for background noise may be eliminated from the process of identifying the maximum tone within a spectrum. When this background noise adjustment procedure is used, the band identified as LGB is treated as the last band of the tone correction calculation in the manner prescribed for the 10 kHz band in paragraph (c)(ix) of NVTOL.1105 - Calculation of Effective Perceived Noise Level, including the calculation of a new slope for band LGB + 1 that equals the slope at LGB (i.e. $s'(l_{LGB} + 1, k) = s'(l_{LGB}, k)$) in Step 5 of the tone correction procedure.

(12) Rejection of spectra due to masking

A spectrum becomes invalid if any of the following conditions prevail:

- if, after any reconstruction of masked bands, more than four one-third octave bands retain masked values; or
- for records within one second of the record associated with the PNLTM spectrum (i.e. five half-second data records), if:
 - more than four high frequency bands require reconstruction; or
 - the LGB is located at or below the 3,150 Hz one-third octave band.

Note.— If an invalid spectrum occurs within the 10 dB-down period, the corresponding test run is invalid and should not be used for aircraft noise certification purposes.

MoC2 NVTOL.1600 - Adjustments of the measured sound levels

DETERMINATION OF REFERENCE-CONDITION NOISE GEOMETRY FOR THE TAKE-OFF, OVERFLIGHT AND APPROACH PROCEDURES

The present MoC is only relevant to the reference procedures of take-off, overflight and approach as specified in NVTOL.1205 – Reference procedures. It provides a procedure that the applicant might deviate from or improve upon in coordination with the Agency.

NVTOL.1600 - Adjustments of the measured sound levels specifies that the measured sound levels of each test run be adjusted to reference conditions, for which this MoC provides an acceptable method. The methodology presented here is dependent on obtaining an average, straight-line flight path that

represents the test aircraft position during noise measurements. It is based on characterizing this average straight-line flight path by a set of single-point descriptors, which can be easily obtained from any method of aircraft TSPI (Time-Space-Position Information) measurement data. Geometry relative to each centre line and lateral microphone of interest is then determined for the test data, including sound emission coordinates (t, X, Y, Z) for each measured acoustic spectrum (k) in the acoustic spectral time-history data set. Once the sound emission coordinates have been identified, sound propagation distances and sound emission angles are calculated, which are used to determine the position of the aircraft on the reference flight path. The series of positions on the reference flight path are then used to obtain the effective duration for each spectrum k for the reference condition acoustic data set.

(a) Assumptions

- The test aircraft position during noise measurements can be represented by a straight-line flight path.
- The ground reference system used in the figures of this MoC is a right-handed coordinate system, approximated to be fixed to the surface of a flat earth with the x-axis pointing along the reference ground track, the y-axis pointing to the left of the reference ground track, and the z-axis pointing up.
- The point on the ground directly beneath the centre line microphone is the origin of the XYZ coordinate system (X = 0, Y = 0, Z = 0).
- The X-coordinate increases with time from negative to positive values as the aircraft moves through the noise measurement test site.
- The single-point flight path descriptors represent average values over the noise duration as specified in paragraph (e) of NVTOL.1105 - Calculation of Effective Perceived Noise Level.
- Angular quantities are expressed in radians except where otherwise noted.

(b) Steps involved

The methodology can be subdivided into the following sequence:

- The test flight path is characterized as an average straight-line based on descriptors for a single point (see (c)).
- The test aircraft position at time of sound emission of each acoustic spectrum is determined (see (d)).
- The geometric minimum distance between the test flight path and the microphone is calculated (see (e)).
- The test aircraft noise geometry (sound propagation distance and sound emission angle) is determined for each acoustic spectrum (see (f)).
- The reference flight path is determined (see (g)).
- The reference sound propagation distance is determined for each acoustic spectrum (see (h)).
- The effective duration for each acoustic spectrum is determined (see (i)).

(c) Characterization of a straight-line average flight path based on descriptors for a single point

A straight-line flight path can be defined knowing the aircraft position, speed and three-dimensional direction (vector) at a single point in time (see Figure 11). For the method described in this section the “single-point” descriptors are:

| | |
|----------|--|
| t_{OH} | is the time at overhead (the time when the aircraft X coordinate = 0.0); |
| X_{OH} | is the aircraft X coordinate at overhead, coinciding with the centre line microphone, $X_{OH} = 0.0$; |
| Y_{OH} | is the lateral offset of the aircraft from the reference ground track at t_{OH} ; |
| Z_{OH} | is the aircraft height above the reference X-Y ground plane at t_{OH} ; |
| V_G | is the average ground speed over the 10 dB downpoint; |
| γ | is the average climb/descent angle; and |
| χ | is the average lateral cross-track angle. |

Note: the average ground speed, V_G , used in calculations for aircraft noise geometry, is independent from any cockpit instrumentation and is to be determined from the aircraft position measurements. For reference conditions, the reference ground speed, V_{GR} , is to be determined from the reference climb/descent angle and its relationship to the reference true airspeed value, V_R .

The straight-line average aircraft flight path t , X, Y, Z position time history from the single-point flight path descriptors is determined at an appropriate sample rate (typically two times per second) according to the following formulas:

For any relative time, $t(p)$:

$$X(p) = (t(p) - t_{OH}) (V_G \cos(\chi)) + X_{OH};$$

$$Y(p) = (t(p) - t_{OH}) (V_G \sin(\chi)) + Y_{OH}; \text{ and}$$

$$Z(p) = (t(p) - t_{OH}) (V_G \tan(\gamma)) + Z_{OH}.$$

Note: the time index p is not necessarily equal to or synchronised with the k^{th} instant in time of the noise readout samples used throughout this document.

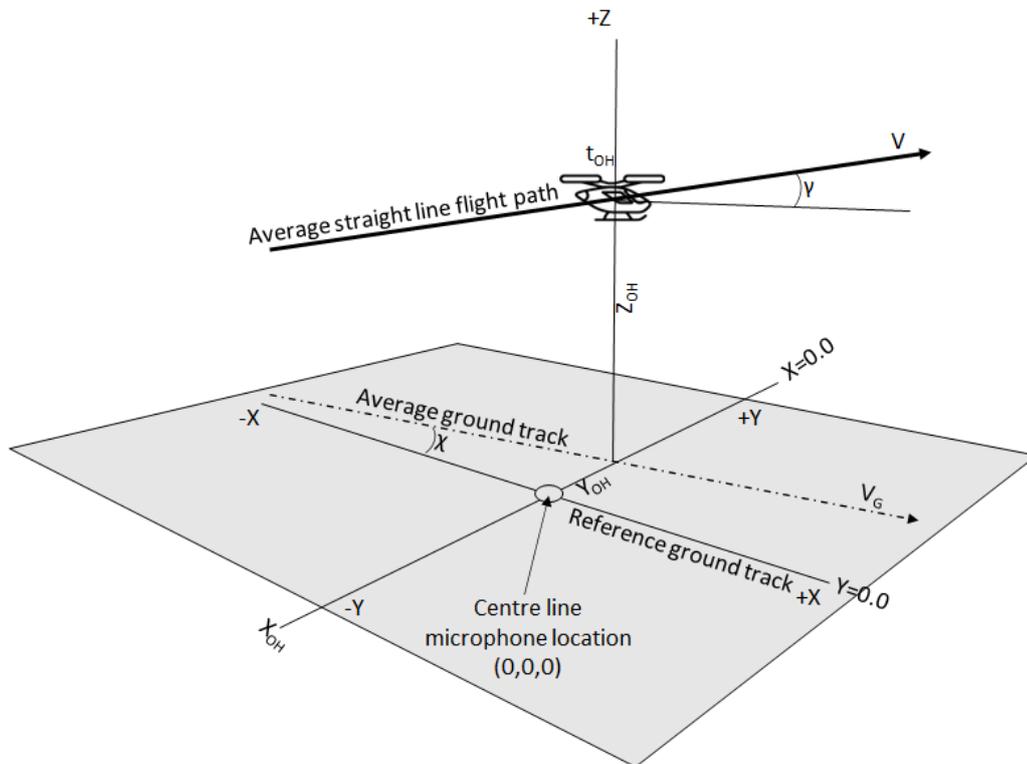


Figure 11: Single-point flight path descriptors

(d) Determination of test aircraft position at time of sound emission of each acoustic spectrum

Because the sound emitted from the aircraft takes a finite time to propagate prior to being received at the measurement microphone, and because during this time, the aircraft has travelled a finite distance along the flight path, it is necessary to determine the time and position coordinates of the aircraft for the point of sound emission for each acoustic record k .

The spectral time history of measured aircraft noise data includes a series of SLOW sample times as specified in paragraph (c) of NVTOL.15-5 - Analysis system. For each of these measurement times, $t_m(k)$, the associated time of sound emission, $t_e(k)$, as well as the sound emission coordinates, $X_E(k)$, $Y_E(k)$, $Z_E(k)$, can be determined using information about the microphone, the measured aircraft position and time, and the test speed of sound (c).

The microphone position descriptors are the following:

- X_{MIC} is the longitudinal distance along the reference ground track, between microphone location and coordinate system origin (typically 0.0);
- Y_{MIC} is the lateral distance between microphone location and the reference ground track (typically 0.0 for centre line microphone, and ± 150 m for lateral microphones);
- Z_{MIC} is the height of ground at microphone location relative to the reference ground plane (typically 0.0); and
- H_{MIC} is the height of microphone above local ground (1.2 m);

An acceptable procedure to determine the aircraft sound emission coordinates corresponding to each measured acoustic data record, k , can be described as follows:

- The speed of sound, c , for the test-day conditions is calculated (see MoC3 NVTOL.1600 - Adjustments of the measured sound levels for the appropriate formula).
- For each p^{th} aircraft position sample in the position time history (defined in (c)), the following parameters is calculated as follows:
 - Slant range between the aircraft and the microphone:

$$SR(p) = \{(X(p) - X_{MIC})^2 + (Y(p) - Y_{MIC})^2 + [Z(p) - (Z_{MIC} + H_{MIC})]^2\}^{0.5}$$
 - Sound propagation time:

$$\delta t_{prop}(p) = SR(p) / c$$
 - Sound reception time:

$$t_{rec}(p) = t(p) + \delta t_{prop}(p)$$
 - Use linear interpolation to obtain the time of sound emission, $t_E(k)$, for each k^{th} measured acoustic spectral data record in the spectral time history, according to the following formula:

$$t_E(k) = t(p_2) + [(t(p_1) - t(p_2)) \times (t_m(k) - t_{rec}(p_2)) / (t_{rec}(p_1) - t_{rec}(p_2))]$$
 where:
 - $t_m(k)$ is the acoustic measurement time for spectral record k (as specified in paragraph (c) of NVTOL.15–5 - Analysis system)
 - p_1 is the aircraft position record where $t_{rec}(p)$ is $> t_m(k)$; and
 - p_2 is the aircraft position record where $t_{rec}(p)$ is $< t_m(k)$.
- The sound emission coordinates $X_E(k)$, $Y_E(k)$ and $Z_E(k)$ for each k^{th} measured acoustic spectral data record are determined as follows:

$$X_E(k) = (t_E(k) - t_{OH}) (V_G \cos(\chi)) + X_{OH};$$

$$Y_E(k) = (t_E(k) - t_{OH}) (V_G \sin(\chi)) + Y_{OH}; \text{ and}$$

$$Z_E(k) = (t_E(k) - t_{OH}) (V_G \tan(\gamma)) + Z_{OH}.$$

(e) Calculation of the geometric minimum distance between the test flight path and the microphone

The geometrical minimum distance (closest point of approach or “CPA”) along the line from the microphone of interest that intersects the straight-line flight path at right angles is calculated according to the following formula:

$CPA = (G_{norm}^2 + G_{CPA}^2)^{0.5}$, which is applied after the following intermediate steps have been followed (the relevant parameters being depicted on Figure 12):

- $Y_{dis} = Y_{MIC} - Y_{OH}$: lateral distance from microphone to average ground track at t_{OH} .
- $G_{norm} = Y_{dis} \cos(\chi)$: line on the ground from the microphone location that intersects the average ground track at right angles.
- $M_{alt} = Z_{OH} - (Z_{MIC} + H_{MIC})$: vertical distance of flight path above microphone.
- $G_{inc} = Y_{dis} \sin(\chi)$: distance along average ground track between $X=0.0$ and intersection with G_{norm} .
- $Z_{inc} = G_{inc} \tan(\gamma)$: vertical difference between G_{alt} and Z_{OH} .

- $G_{alt} = M_{alt} + Z_{inc}$: vertical height of flight path above microphone at intersection of G_{norm} and average ground track.
- $GCPA = G_{alt} \cos(\gamma)$: line from the point at the microphone height (H_{MIC}) vertically above the point where G_{norm} intersects the average ground track, which intersects the average straight line flight path at right angles.

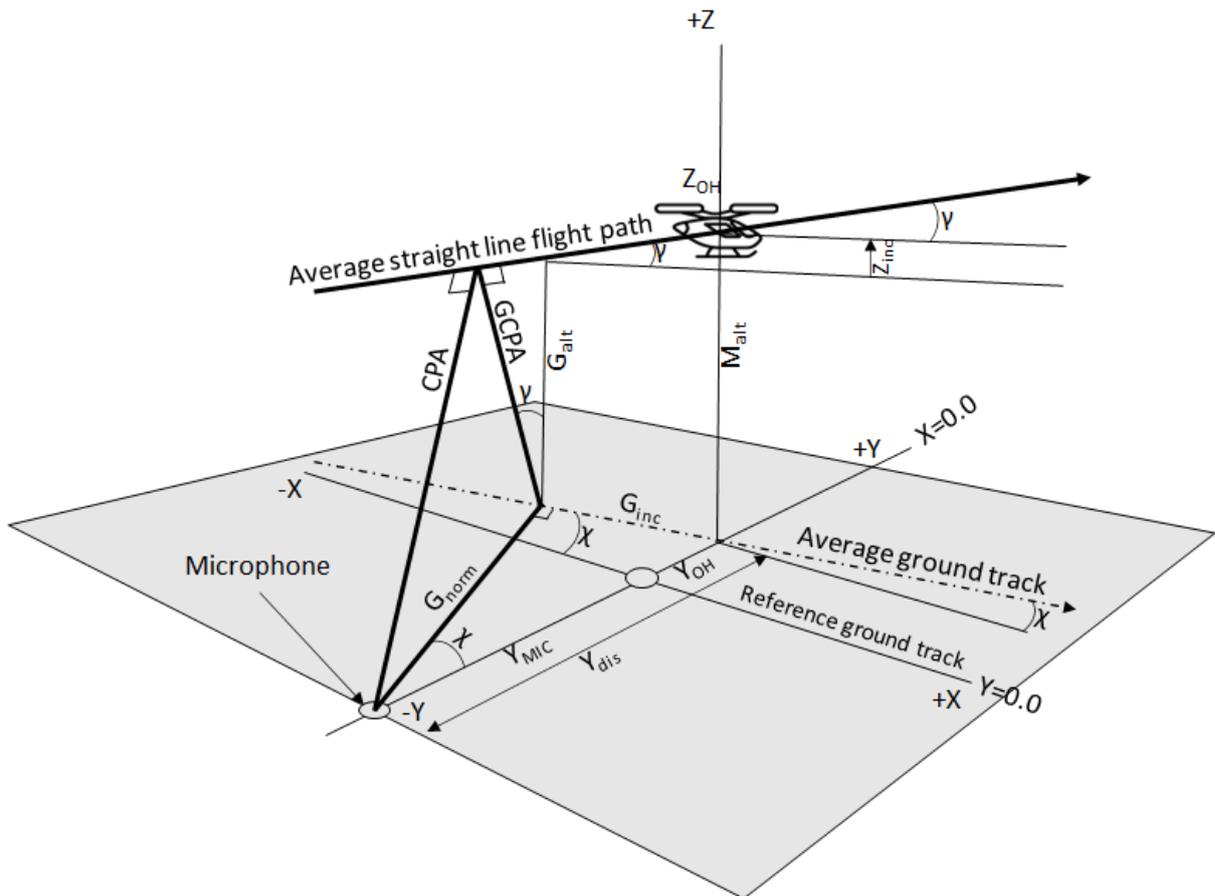


Figure 12: Detailed CPA geometry

- (f) Determination of test aircraft noise geometry (sound propagation distance and sound emission angle) for each acoustic spectrum
- The sound propagation distance between the aircraft and the microphone, $SR(k)$, is calculated for each spectrum k in the spectral time history according to the following formula. It is used for calculations of sound attenuation due to spherical spreading, as well as for sound attenuation due to atmospheric absorption.

$$SR(k) = [(X_E(k) - X_{MIC})^2 + (Y_E(k) - Y_{MIC})^2 + (Z_E(k) - [Z_{MIC} + H_{MIC}])^2]^{0.5}$$

- The three-dimensional sound emission angle, θ , is calculated for each spectrum k with the following formulas. It is used for determining the aircraft position on the reference flight path when adjusting noise data to reference conditions.
 - $\theta(k) = \arcsin(CPA / SR(k))$ when the aircraft is positioned prior to CPA;
 - $\theta(k) = \pi/2$ (90°) when aircraft is positioned at CPA; and
 - $\theta(k) = \pi - \arcsin(CPA / SR(k))$ when aircraft is positioned subsequent to CPA.
- (g) Determination of reference flight path

The reference flight path of take-off, overflight or approach resulting from the reference procedures specified in NVTOL.1205 – Reference procedures is a straight line with no lateral component ($Y=0$ along the entire flight path). The following parameters and associated definitions apply to the determination of the reference flight path, some of which are illustrated on Figure 13:

- Z_{OHR} is the vertical height of the reference flight path above the reference ground plane at t_{OH} ;
- V_{GR} is the reference ground speed;
- C_R is the reference speed of sound, 346.1 m/s;
- γ_R is the reference climb/descent angle;
- Y_{MICR} is the lateral distance between the reference microphone location and the reference ground track; and
- H_{MICR} is the height of the reference microphone (1.2 m) above the reference ground plane.

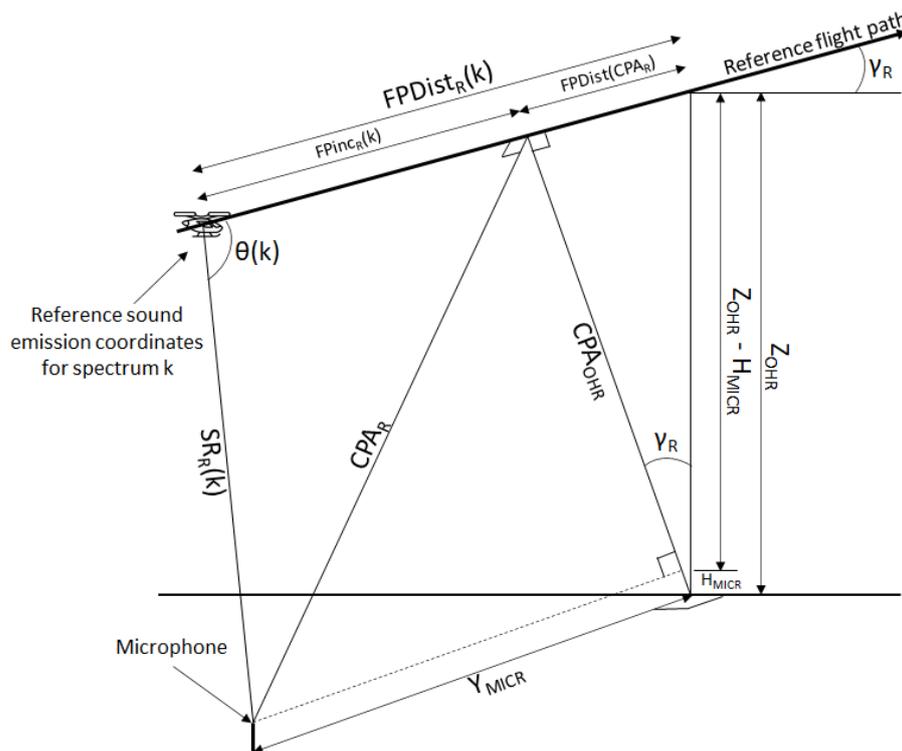


Figure 13: depiction of reference flight path and sound propagation

The closest point of approach between reference flight path and microphone, CPA_R , is calculated as follows:

$$CPA_R = (CPA_{OHR}^2 + Y_{MICR}^2)^{0.5} \text{ where } CPA_{OHR} = (Z_{OHR} - H_{MICR}) \cos(\gamma_R)$$

(h) Determination of reference sound propagation distance for each acoustic spectrum

The reference sound propagation distance at the k^{th} instant in time, $SR_R(k)$, is determined through the following formula: $SR_R(k) = CPA_R / \sin(\theta(k))$.

(i) Determination of time interval increments for each acoustic spectrum

The effective time interval increments to be used in the calculation of the EPNL according to the specifications of paragraph (b)(8) of NVTOL.1105 - Calculation of Effective Perceived Noise Level, $\delta t_R(k)$, are established according to the following formula and steps: $\delta t_R(k) = [(t_R(k) - t_R(k-1)) + (t_R(k+1) - t_R(k))] / 2$, where

- $t_R(k) = t_{ER}(k) + \delta t_{PROP_R}(k)$ is the time of sound reception at the microphone for sound emitted at point k;
- $\delta t_{PROP_R}(k) = SR_R(k) / c_R$ is the sound propagation time for sound emission point k;
- $t_{ER}(k) = t_{OH} - (FPDist_R(k) / V_R)$ is the time of sound emission for point k and V_R the true airspeed of the reference procedure specified in NVTOL.1205 – Reference procedures;
- $FPDist_R(k) = FPDist(CPA_R) + FPInc_R(k)$ is the distance along the flight path from point k to the overhead point;
- $FPInc_R(k)$ is the distance along the reference flight path from sound emission point k to CPA_R , which is calculated as follows:

$FPInc_R(k) = CPA_R / \tan(\theta(k))$, taking its sign from sound emission angle $\theta(k)$ as follows:

- $FPInc_R(k)$ is positive when $\theta(k) < \pi/2$ (i.e. < 90 degrees);
- $FPInc_R(k) = 0$ when $\theta(k) = \pi/2$ (i.e. 90 degrees); and
- $FPInc_R(k)$ is negative when $\theta(k) > \pi/2$ (i.e. > 90 degrees);
- $FPDist(CPA_R) = CPA_{OHR} \tan(\gamma_R)$ is the distance along the reference flight path from CPA_R to t_{OH} .

MoC3 NVTOL.1600 - Adjustments of the measured sound levels

SOURCE NOISE CORRECTION

If appropriate, and in coordination with the Agency, the source noise adjustment specified in paragraph (b)(9) of NVTOL.1600 - Adjustments of the measured sound levels may be added to the values of reference tone-corrected perceived noise level of the i^{th} run at every k^{th} instant in time, $PNLT_{ref,i}(k)$,

| | | |
|--|--|--|
|  <p>EASA European Union Aviation Safety Agency</p> | <p>Consultation Paper</p> <p>Environmental Protection Technical Specifications applicable to eVTOL powered by multiple, vertical, non-tilting, evenly distributed rotors</p> | <p>Issue : 1 Date : 04 May 2023 Proposed <input checked="" type="checkbox"/> Final <input type="checkbox"/> Deadline for comments: 15 June 2023</p> |
|--|--|--|

defined in and established according to paragraph (b)(5) of NVTOL.1600 - Adjustments of the measured sound levels.

IM1 NVTOL.1600 - Adjustments of the measured sound levels

EFFECTIVE TIME INTERVAL INCREMENTS

For the take-off, overflight and approach procedures, paragraph (b)(2) of NVTOL.1600 - Adjustments of the measured sound levels specifies that the measured PNL time history be adjusted to the reference profiles specified in NVTOL.1205 – Reference procedures. Consequently, and unless the test and reference conditions are identical, the reception time intervals between the reference data points will typically neither be equally spaced nor equal to one-half second.

IM2 NVTOL.1600 - Adjustments of the measured sound levels

DETERMINATION OF THE MAXIMUM PNLTM

The procedure specified in paragraph (b)(6) of NVTOL.1600 - Adjustments of the measured sound levels specifies how to determine the maximum value of the reference tone-corrected perceived noise level of the i^{th} run, $PNLTM_{ref,i}$, for the take-off, overflight and approach procedures. Due to differences between test and reference conditions, it is possible that $PNLTM_{ref,i}$ will not occur at the data point associated with the measured maximum PNL of the i^{th} run, $PNLTM_i$. The determination of $PNLTM_{ref,i}$ is independent of $PNLTM_i$.

IM3 NVTOL.1600 - Adjustments of the measured sound levels

SOURCE NOISE ADJUSTMENT

For the take-off, overflight and approach procedures, paragraph (b)(9) of NVTOL.1600 - Adjustments of the measured sound levels specifies that a source noise adjustment be applied to each reference tone-corrected perceived noise level of the i^{th} run at the k^{th} instant in time. The selection of the correlating noise parameter(s) should account for the possible impact of the following deviations between the flight test procedures of NVTOL.1405 - Flight test procedures and the reference procedures of NVTOL.1205 – Reference procedures, either combined or taken in isolation:

- (A) airspeed deviations; and/or
- (B) individual rotor speed deviations; and/or
- (C) power output in relation to battery State of Charge.



NVTOL.1605 – Satisfying maximum allowable noise levels

- (a) Each reference sound level, $EPNL_{TOref}$, $EPNL_{OVref}$, $EPNL_{APref}$, and L_{Aeqref} , corresponding to the take-off, overflight, approach and hover reference procedures specified in NVTOL.1205 – Reference procedures respectively, should not exceed the corresponding values specified in Subpart D;
- (b) The 90 per cent confidence interval should be within $EPNL_{TOref} \pm 1.5$ EPNdB, $EPNL_{OVref} \pm 1.5$ EPNdB, $EPNL_{APref} \pm 1.5$ EPNdB and $L_{Aeqref} \pm 1.5$ dB(A) respectively.
- (c) For the take-off procedure:

- (1) The reference sound level, $EPNL_{TOref}$, is calculated from the reference sound levels associated to each i^{th} run, $EPNL_{TOref,i}$, as follows: $EPNL_{TOref} = \frac{1}{n} \left\{ \sum_{i=1}^n EPNL_{TOref,i} \right\}$

where n is the number of valid runs acquired for the take-off procedure.

- (2) The 90 per cent confidence interval associated to the take-off reference sound level, $CI_{EPNL_{TOref}}$, is calculated using the Student's t-distribution for all reference sound levels, $EPNL_{TOref,i}$, with the following formula:

$$CI_{EPNL_{TOref}} = EPNL_{TOref} \pm t_{(95,\zeta)} \frac{s_{EPNL_{TOref}}}{\sqrt{n}}$$

where:

- $t_{95,\zeta}$ is the 95th percentile of the single-sided Student's t-distribution and depends on the degree of freedom ζ , where $\zeta = n-1$.
- $s_{EPNL_{TOref}} = \sqrt{\frac{\sum_{i=1}^n (EPNL_{TOref,i} - EPNL_{TOref})^2}{n-1}}$ is the estimate of the standard deviation associated to $EPNL_{TOref}$.

- (d) For the overflight procedure:

- (1) The reference sound level, $EPNL_{OVref}$, is calculated from the reference sound levels associated to each i^{th} run, $EPNL_{OVref,i}$, as follows: $EPNL_{OVref} = \frac{1}{n} \left\{ \sum_{i=1}^n EPNL_{OVref,i} \right\}$

where n is the number of valid runs acquired for the overflight procedure.

- (2) The 90 per cent confidence interval associated to the overflight reference sound level, $CI_{EPNL_{OVref}}$, is calculated using the Student's t-distribution for all reference sound levels, $EPNL_{OVref,i}$, with the following formula:

$$CI_{EPNL_{OVref}} = EPNL_{OVref} \pm t_{(95,\zeta)} \frac{s_{EPNL_{OVref}}}{\sqrt{n}}$$

where:

- $t_{95,\zeta}$ is the 95th percentile of the single-sided Student's t-distribution and depends on the degree of freedom ζ , where $\zeta = n-1$.

- $s_{EPNL_{OVref}} = \sqrt{\frac{\sum_{i=1}^n (EPNL_{OVref,i} - EPNL_{OVref})^2}{n-1}}$ is the estimate of the standard deviation associated to $EPNL_{OVref}$.

(e) For the approach procedure:

(1) The reference sound level, $EPNL_{APref}$, is calculated from the reference sound levels associated to each i^{th} run, $EPNL_{APref,i}$, as follows: $EPNL_{APref} = \frac{1}{n} \{ \sum_{i=1}^n EPNL_{APref,i} \}$

where n is the number of valid runs acquired for the approach procedure.

(2) The 90 per cent confidence interval associated to the approach reference sound level, $CI_{EPNL_{APref}}$, is calculated using the Student's t-distribution for all reference sound levels, $EPNL_{APref,i}$, with the following formula:

$$CI_{EPNL_{APref}} = EPNL_{APref} \pm t_{(95,\zeta)} \frac{s_{EPNL_{APref}}}{\sqrt{n}}$$

where:

- $t_{95,\zeta}$ is the 95th percentile of the single-sided Student's t-distribution and depends on the degree of freedom ζ , where $\zeta = n-1$.

- $s_{EPNL_{APref}} = \sqrt{\frac{\sum_{i=1}^n (EPNL_{APref,i} - EPNL_{APref})^2}{n-1}}$ is the estimate of the standard deviation associated to $EPNL_{APref}$.

(f) For the hover procedure:

(1) The arithmetic average sound level, $L_{Aref_{av,j}}$ at the j^{th} reference noise position specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points, is calculated from all reference sound levels, $L_{Aref,i,j}$, as follows:

$$L_{Aref_{av,j}} = \frac{1}{n} \{ \sum_{i=1}^n L_{Aref,i,j} \}$$

- where $L_{Aref,i,j}$ is the reference sound level of the i^{th} run at the j^{th} reference noise position specified in paragraph (d) of NVTOL.1200 - Reference noise measurement points over the n valid runs of the hover procedure.

(2) The 90 per cent confidence interval, $CI_{L_{Aref_{av,j}}}$, is calculated for the average sound level, $L_{Aref_{av,j}}$, using the Student's t-distribution for all reference sound levels, $L_{Aref,i,j}$, with the following formula:

$$CI_{L_{Aref_{av,j}}} = L_{Aref_{av,j}} \pm t_{(95,\zeta)} \frac{s_{L_{Aref_{av,j}}}}{\sqrt{n}}$$

where:

- $t_{95,\zeta}$ is the 95th percentile of the single-sided Student's t-distribution and depends on the degree of freedom ζ , where $\zeta = n-1$.

- $s_{L_{A_{Eref_{av,j}}}} = \sqrt{\frac{\sum_{i=1}^n (L_{A_{Eref_{i,j}}} - L_{A_{Eref_{av,j}}})^2}{n-1}}$ is the estimate of the standard deviation associated to $L_{A_{Eref_{av,j}}}$
- n is the number of valid runs.

IM1 NVTOL.1605 – Satisfying maximum allowable noise levels

90 PER CENT CONFIDENCE INTERVAL

- (a) The sound levels that are adjusted are measured under conditions as similar as possible for each reference procedure. However, the individual sound levels are not identical due to the measurement variability. The 90% confidence interval provides the range in which the unknown true average value of the sound level can be found with a 90% confidence level.
- (b) Since the sound levels are obtained under conditions as similar as possible, they are assumed to constitute a random sample of a normally distributed population with a true mean population and a standard deviation. However, since the number of measured sound levels is small, the Student's t-distribution is used instead of the normal distribution to calculate the 90% confidence interval.
- (c) The values of the 95th percentile of the single-sided Student's t-distribution, $t_{.95,\zeta}$, as a function of the degree of freedom, ζ , for a 90% confidence interval are listed below:

Consultation Paper
Environmental Protection Technical
Specifications applicable to eVTOL
powered by multiple, vertical, non-tilting,
evenly distributed rotors

Issue : 1
Date : 04 May 2023
Proposed Final
Deadline for comments: 15 June 2023

| ζ | $t_{95,\zeta}$ |
|---------|----------------|
| 1 | 6.314 |
| 2 | 2.920 |
| 3 | 2.353 |
| 4 | 2.132 |
| 5 | 2.015 |
| 6 | 1.943 |
| 7 | 1.895 |
| 8 | 1.860 |
| 9 | 1.833 |
| 10 | 1.812 |
| 12 | 1.782 |
| 14 | 1.761 |
| 16 | 1.746 |
| 18 | 1.734 |
| 20 | 1.725 |
| 24 | 1.711 |
| 30 | 1.697 |
| 60 | 1.671 |
| >60 | 1.645 |

SUBPART H – REPORTING

NVTOL.1700 - Noise data

The applicant should report the following noise data to the Agency:

- (a) For the reference take-off procedure,
- (1) All reference flight profile parameters relevant to the specifications set forth in paragraph (c) of NVTOL.1205 – Reference procedures;
 - (2) The reference sound level, $EPNL_{TOref}$, and its associated 90 per cent confidence interval $CI_{EPNL_{TOref}}$, along with the intermediate calculation steps relevant to the adjustment specifications of NVTOL.1600 - Adjustments of the measured sound levels;
 - (3) the margin to the corresponding maximum allowable noise level specified in Subpart D;
 - (4) for each i^{th} valid run of the procedure:
 - (i) the reference sound levels $EPNL_{TOref,i}$;
 - (ii) the details of the adjustment calculations carried out as specified in NVTOL.1600 - Adjustments of the measured sound levels. These include the measured sound pressure levels presented in one-third octave band levels conforming with the specifications of NVTOL.15–5 - Analysis system;
- (b) For the reference overflight procedure,
- (1) All reference flight profile parameters relevant to the specifications set forth in paragraph (d) of NVTOL.1205 – Reference procedures;
 - (2) The reference sound level, $EPNL_{ORef}$, and its associated 90 per cent confidence interval $CI_{EPNL_{ORef}}$, along with the intermediate calculation steps relevant to the adjustment specifications of NVTOL.1600 - Adjustments of the measured sound levels;
 - (3) the margin to the corresponding maximum allowable noise level specified in Subpart D;
 - (4) for each i^{th} valid run of the procedure:
 - (i) the reference sound levels $EPNL_{ORef,i}$;
 - (ii) the details of the adjustment calculations carried out as specified in NVTOL.1600 - Adjustments of the measured sound levels. These include the measured sound pressure levels presented in one-third octave band levels conforming with the specifications of NVTOL.15–5 - Analysis system;
- (c) For the reference approach procedure,
- (1) All reference flight profile parameters relevant to the specifications set forth in paragraph (e) of NVTOL.1205 – Reference procedures;
 - (2) The reference sound level, $EPNL_{APref}$, and its associated 90 per cent confidence interval $CI_{EPNL_{APref}}$, along with the intermediate calculation steps relevant to the adjustment specifications of NVTOL.1600 - Adjustments of the measured sound levels;
 - (3) the margin to the corresponding maximum allowable noise level specified in Subpart D;
 - (4) for each i^{th} valid run of the procedure:

- (i) the reference sound levels $EPNL_{Ovref,i}$;
 - (ii) the details of the adjustment calculations carried out as specified in NVTOL.1600 - Adjustments of the measured sound levels. These include the measured sound pressure levels presented in one-third octave band levels conforming with the specifications of NVTOL.15-5 - Analysis system;
- (d) For the reference hover procedure,
- (1) The reference sound levels, $L_{aEref_{av,j}}$ at the j^{th} reference noise position, and their associated 90 per cent confidence interval $CI_{L_{aEref_{av,j}}}$, along with the intermediate calculation steps relevant to the adjustment specifications of paragraph (c) of NVTOL.1600 - Adjustments of the measured sound levels;
 - (2) for each i^{th} valid run of the procedure and each j^{th} measuring station, the details of the adjustment calculations carried out as specified in NVTOL.1600 - Adjustments of the measured sound levels. These include the measured sound pressure levels presented in one-third octave band levels conforming with the specifications of NVTOL.15-5 - Analysis system.
- (e) For all procedures,
- (1) all checks and calibration corrections specified in paragraph (b) of NVTOL.1410 - Noise measurement, including those for the environmental effects on sound calibrator output level; and
 - (2) the corrections for free-field frequency response of the microphone system specified in NVTOL.1505 – Microphone system characteristics and set-up.

NVTOL.1705 - Aircraft information

The applicant should report the following information related to the test aircraft to the Agency:

- (a) The type, model and serial numbers, if applicable, of the test aircraft vehicle and its rotors or propellers;
- (b) A list and description of all noise-germane parts of the test aircraft vehicle that deviate from production design, and due justification to substantiate why these deviations do not affect the acoustic characteristics of the test aircraft vehicle, in line with the specification of paragraph (a) of NVTOL.1405 - Flight test procedures.
- (c) The aircraft MTOM;
- (d) The values of all parameters considered in the specifications of NVTOL.1205 – Reference procedures;
- (e) The identification of the aircraft point being tracked for the aircraft positioning and details of the transposition from that point to the centre of gravity of the aircraft;

NVTOL.1710 - Additional test information

The applicant should report the following additional test information to the Agency:

- (a) For each run:
 - (1) The temperatures measured at 10m and at the aircraft location;
 - (2) The relative humidity;
 - (3) The average wind speed and the average wind direction;
 - (4) The atmospheric pressure;
 - (5) The value of the ground speed for the overflight test procedure;
 - (6) The true air speed;
 - (7) The climb or descent gradient;
- (b) For each rejected run, a short description of the reason for the rejection;
- (c) The type of equipment used for the measurement and analysis of the sound levels;
- (d) The type of meteorological instruments used during the test;
- (e) A description of the local topography, ground cover, and any event that might interfere with the sound level recording.